

Accepted Manuscript

Research papers

Numerical modelling of hydro-morphological processes dominated by fine suspended sediment in a stormwater pond

Mingfu Guan, Sangaralingam Ahilan, Dapeng Yu, Yong Peng, Nigel Wright

PII: S0022-1694(17)30759-X

DOI: <https://doi.org/10.1016/j.jhydrol.2017.11.006>


Reference: HYDROL 22364

To appear in: *Journal of Hydrology*

Received Date: 23 May 2017

Revised Date: 7 September 2017

Accepted Date: 3 November 2017

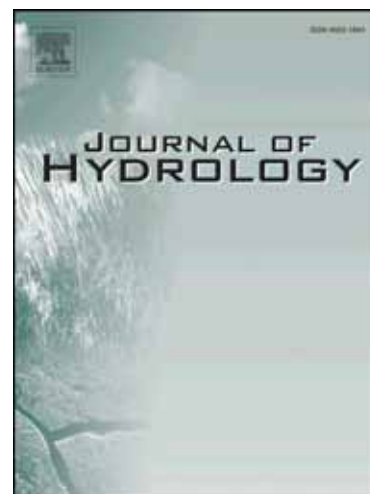

Please cite this article as: Guan, M., Ahilan, S., Yu, D., Peng, Y., Wright, N., Numerical modelling of hydro-morphological processes dominated by fine suspended sediment in a stormwater pond, *Journal of Hydrology* (2017), doi: <https://doi.org/10.1016/j.jhydrol.2017.11.006>

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

Numerical modelling of hydro-morphological processes dominated by fine suspended sediment in a stormwater pond

Mingfu Guan^{1*}, Sangaralingam Ahilan², Dapeng Yu¹, Yong Peng^{3†}, Nigel Wright⁴

¹ Department of Geography, Loughborough University, Loughborough, UK

² Centre for Water Systems, University of Exeter, Exeter, UK

³ State Key Laboratory for Hydraulics and Mountain River Engineering, Sichuan University, China

⁴ Faculty of Technology, De Montfort University, Leicester, UK

ABSTRACT: Fine sediment plays crucial and multiple roles in the hydrological, ecological and geomorphological functioning of river systems. This study employs a two-dimensional (2D) numerical model to track the hydro-morphological processes dominated by fine suspended sediment, including the prediction of sediment concentration in flow bodies, and erosion and deposition caused by sediment transport. The model is governed by 2D full shallow water equations with which an advection-diffusion equation for fine sediment is coupled. Bed erosion and sedimentation are updated by a bed deformation model based on local sediment entrainment and settling flux in flow bodies. The model is initially validated with the three laboratory-scale experimental events where suspended load plays a dominant role. Satisfactory simulation results confirm the model's capability in capturing hydro-morphodynamic processes dominated by fine suspended sediment at laboratory-scale. Applications to sedimentation in a stormwater pond are conducted to develop the process-based understanding of fine sediment dynamics over a variety of flow conditions. Urban flows with 5-year, 30-year and 100-year return period and the extreme flood event in 2012 are simulated. The modelled results deliver a step change in understanding fine sediment dynamics in stormwater ponds. The model is capable of quantitatively simulating and qualitatively assessing the performance of a stormwater pond in managing urban water quantity and quality.

* Corresponding to: Dr. Mingfu Guan, Research Fellow, Department of Geography, Loughborough University, UK, m.guan@lboro.ac.uk, and

† Dr. Yong Peng, Associate Professor, College of Water Resources and Hydropower, Sichuan University, China, pengyongscu@foxmail.com

KEYWORDS: shallow water equations; suspended load; morphological changes; stormwater pond

1. Introduction

In river systems, fine-grained sediment is a natural and essential component and plays a crucial role in the hydrological, ecological and geomorphological functioning of the system. It has been recognised that fine-grained sediment management in urban rivers is environmentally significant (Birch et al., 2006). Sustainable sediment management requires a structure of supporting research on fine sediment dynamics and its interactions within hydrological catchments such as rivers, floodplains, reservoirs and Sustainable Urban Drainage Systems (SuDS) (Owens et al. 2005).

In general, fine-grained sediment has a controlling influence on the quality and quantity of receiving water. In an urban catchment, contaminants and pollutants including heavy metals and nutrients are generally absorbed by fine sediment which is then conveyed to the receiving waters (Saeedi et al. 2004; Jartun et al., 2008; Jones et al. 2008). These urban pollutants attached to sediments have implications on both habitats of downstream receiving waters and human health (Wood and Armitage 1997; Owens et al. 2005; Crosa et al. 2010). To mitigate these risks, more sustainable features, such as stormwater ponds, are increasingly used in urban catchments as an option to manage fine suspended sediments (Ahilan et al, 2016; Allen et al, 2016) by storing stormwater runoff, trapping fine sediments and improving urban runoff quality. The movement of sediment will be minimised by the interrupted flows in a storm water pond. The low energy environment in the pond enables the considerable proportion of fine suspended load is trapped which provides water quality benefits to receiving water bodies. However, from a longer-term viewpoint, this will diminish the storage capacity of stormwater ponds, thereby influencing their hydraulic performance and maintenance. Similarly, fine-grained sedimentation occurs in dam reservoirs where the release of deposited sediments often leads to cascading effects in downstream reaches through sediment transport and re-deposition (Liu et al. 2004). This has been considered to be a worldwide problem (Vorosmarty et al., 2003). Additionally, excessive

suspended sediment inputs to rivers due to catchment erosion and in-channel bank erosion can cause sedimentation in channels which may affect channel morphology, stream habitats and navigation (Eekhout et al., 2015). In view of the sediment effects, natural processes have been widely used for river and flood management in recent years (Dadson et al., 2017). In the aforementioned cases, fine suspended sediment has a controlling influence on the quality and quantity of receiving waters in hydro-systems through playing a variety of roles. Therefore, there is a need to develop an improved understanding of how fine-grained sediment is eroded, transported and deposited by a variety of flow environments.

In recent years, numerical models have been increasingly used to understand complex flows, sediment transport and the corresponding morphological changes in rivers, floodplains and SuDS. In view of the multiple roles of fine-grained sediment in receiving waters, a robust fine sediment model is crucial to develop coupled models enabling the simulations and understanding of hydrological, ecological and geomorphological conditions of catchments. Recently numerical models have been used to simulate dam-break induced in-channel evolution (Cao et al., 2004; Simpson and Castellort, 2006; Bohorquez and Fernandez-Feria, 2008, Zech et al., 2008; Benkhaldoun et al., 2012; Li and Duffy, 2012; Guan et al., et al. 2014), sediment routing in dam reservoirs (Liu et al., 2004; Geurtault et al., 2016), turbidity currents over erodible bed (Hu and Cao, 2009; Hu et al., 2012; Janocko et al., 2013). This provides feasible mathematical modelling approaches to quantify the evolution of sediment-laden flows and corresponding geomorphological changes dominated by fine-grained sediment.

This research presents a 2D numerical tool to track the erosion, transport and deposition of fine-grained sediment and particularly investigate fine sediment dynamics in stormwater ponds. The model is a depth-averaged 2D numerical model that includes a robust shallow water based hydrodynamic model, a suspended load transport model and a bed evolution model. It provides more reliable information than a 1D model whilst being more cost-effective than a 3D model. The model is capable of simulating full sediment transport process where non-cohesive fine suspended load plays a dominant role, including both sediment concentration in flow bodies and bed changes. This is not only limited to a case with full suspended load transport, but also to a

case which may have a small portion of bedload. Whatever, this should have a small rouse number lower than 2.5 during the main transport stage. The model is firstly validated against three laboratory-scale experiments prior to a real-world application in a stormwater pond located in Newcastle Great Park, UK. Based on the simulation results, this study aims to determine the erosion, transport and deposition characteristics of fine sediment in a stormwater pond with various flow conditions and to develop a greater understanding of fine-grained sediment dynamics in stormwater ponds.

2. Numerical Model

2.1. Hydrodynamic model

Shallow water based numerical models have been widely used for hydraulic modelling due to their robustness in capturing flow hydraulics (Guan et al., 2013; Vacondio et al, 2014; Costabile and Macchione, 2015; Hou et al., 2015). The 2D shallow water equations can be expressed by in a vector form as:

$$\frac{\partial \eta}{\partial t} + \frac{\partial hu}{\partial x} + \frac{\partial hv}{\partial y} = 0 \quad (1a)$$

$$\frac{\partial hu}{\partial t} + \frac{\partial}{\partial x} \left(hu^2 + \frac{1}{2} gh^2 \right) + \frac{\partial huv}{\partial y} = \frac{\partial hT_{xx}}{\partial x} + \frac{\partial hT_{yx}}{\partial y} - gh \frac{\partial z_b}{\partial x} - ghS_{fx} + \frac{\Delta \rho u}{\rho} \frac{\partial z_b}{\partial t} - \frac{\Delta \rho gh^2}{2\rho} \frac{\partial C}{\partial x} \quad (1b)$$

$$\frac{\partial hu}{\partial t} + \frac{\partial huv}{\partial x} + \frac{\partial}{\partial y} \left(hv^2 + \frac{1}{2} gh^2 \right) = \frac{\partial hT_{xy}}{\partial x} + \frac{\partial hT_{yy}}{\partial y} - gh \frac{\partial z_b}{\partial y} - ghS_{fy} + \frac{\Delta \rho v}{\rho} \frac{\partial z_b}{\partial t} - \frac{\Delta \rho gh^2}{2\rho} \frac{\partial C}{\partial y} \quad (1c)$$

where h = flow depth, z_b = bed elevation, $\eta = h + z_b$ denotes the water surface elevation which includes both changes of the water depth and bed elevation varying with the time t , u and v = the depth-averaged flow velocity components in the two Cartesian directions, g = acceleration due to gravity, ρ = sediment porosity, C = total volumetric sediment concentration, ρ_s and ρ_w denote the densities of sediment and water respectively, $\Delta \rho = \rho_s - \rho_w$, ρ = density of flow-sediment mixture, S_{fx} , S_{fy} = frictional slope in x and y components which are calculated based on Manning's roughness coefficient n by $S_{fx} = \frac{n^2 u \sqrt{u^2 + v^2}}{h^{4/3}}$; $S_{fy} = \frac{n^2 v \sqrt{u^2 + v^2}}{h^{4/3}}$, T_{xx} , T_{xy} , T_{yx} and T_{yy} are the depth-averaged turbulent stresses which are determined by the Boussinesq approximation which has been widely used in the literature (e.g. Wu, 2004; Abad et al., 2008; Begnudelli et al., 2010). This

gives the Reynolds stresses as:

$$T_{xx} = -2(v_t + \nu) \frac{\partial u}{\partial x} \quad (2a)$$

$$T_{xy} = T_{yx} = -(v_t + \nu) \left(\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} \right) \quad (2b)$$

$$T_{yy} = -2(v_t + \nu) \frac{\partial v}{\partial y} \quad (2c)$$

where v_t is the turbulence eddy viscosity and ν is the molecular viscosity which can be ignored in environmental applications. Various approaches have been adopted to estimate the turbulence viscosity, e.g. assuming a constant eddy viscosity, an algebraic turbulence model ($v_t \sim hu^*$), as well as the $k - \epsilon$ turbulence model. In this study, the eddy viscosity is estimated by $v_t = \beta hu^*$ with $\beta = 0.5$.

2.2. Fine suspended load model

The suspended load transport is governed by the advection-diffusion equation. For non-uniform graded sediment mixtures, it is necessary to divide the graded sediments into fractions due to the difference of grain-size related parameters. For the suspended transport of each fraction, the governing equation is described by

$$\frac{\partial h C_i}{\partial t} + \frac{\partial h u C_i}{\partial x} + \frac{\partial h v C_i}{\partial y} = \frac{\partial}{\partial x} \left(\epsilon_s h \frac{\partial C_i}{\partial x} \right) + \frac{\partial}{\partial y} \left(\epsilon_s h \frac{\partial C_i}{\partial y} \right) + (S_{E,i} - S_{D,i}) \quad (3)$$

where ϵ_s is the diffusion coefficient of sediment particles; $S_{E,i}$ is the entrainment flux of sediment for the i^{th} fraction; $S_{D,i}$ is the deposition flux of sediment of the i^{th} fraction. The diffusion coefficient of sediment particles is related to the diffusion of fluid momentum, and it is determined by using the below formula presented in van Rijn (1984).

$$\epsilon_s = \beta \phi v_t \quad (4)$$

where the factor β represents the difference in the diffusion of a sediment particle and a fluid particle and it is assumed to be constant over the flow depth (van Rijn 1984). ϕ represents the damping of the fluid turbulence by the sediment particles and it is assumed to be dependent on the local sediment concentration. Both factors are calculated by using the formula derived by van

Rijn (1984), which are widely used (e.g. Duan and Nanda, 2006).

$$\beta = 1 + 2 \left(\frac{\omega_f}{u_*} \right)^2 \quad \text{for } 0.1 < \frac{\omega_f}{u_*} < 1$$

$$\phi = 1 + \left(\frac{C_a}{C_{ae}} \right)^{0.8} - 2 \left(\frac{C_a}{C_{ae}} \right)^{0.4}$$

where C_a is the near-bed concentration at the reference level a (average for non-uniform sediments); C_{ae} is the near bed equilibrium concentration (average for non-uniform sediments). Both are defined below. As there is no universal theoretical expression for the entrainment flux and deposition flux of sediments, both variables are calculated by the following widely-used function.

$$S_{E,i} = F_i \omega_{f,i} C_{ae,i}; \quad S_{D,i} = F_i \omega_{f,i} C_{a,i} \quad (5)$$

where F_i , percentage of the i^{th} grain fraction; $\omega_{f,i}$ is the effective settling velocity for the i^{th} grain fraction which is calculated by the function derived by Soulsby (1996) as below;

$$\omega_{f,i} = \frac{\nu}{d_i} \left[\sqrt{10.36^2 + (1 - C_i)^{4.7} 1.049 d_*^3} - 10.36 \right] \quad (6)$$

$C_{a,i} = \delta C_i$ is the near-bed concentration for the i^{th} grain fraction at the reference level a ; the definition of the coefficient δ by Cao et al., (2004) is: $\delta = \min\{2.0, (1 - p)/C\}$; $C_{ae,i}$ is the near bed equilibrium concentration for the i^{th} grain fraction at the reference level that is calculated by using the van Rijn formula (van Rijn, 1984). For each grain fraction, the function can be expressed as:

$$C_{ae,i} = 0.015 \frac{d_{50} T^{1.5}}{a d_*^{0.3}} \quad (7)$$

$$T = \frac{(u_*'^2 - u_{*,cr}^2)}{u_{*,cr}^2}$$

$$a = \min[\max(k_s, 2d_{50}, 0.01h), 0.2h]$$

where k_s is the equivalent roughness height; $d_* = d[(\rho_s/\rho_w - 1)g/\nu^2]^{1/3}$ is the dimensionless particle diameter; ν is the viscosity of water; $u_*' = u(\sqrt{g/C'})$ is bed-shear velocity related to grain; C' is the Chézy-coefficient related to grain; $u_{*,cr} = \sqrt{(s - 1)gd\theta_c}$ is the critical bed-shear velocity, where θ_c is the Shields shear stress.

2.3. Morphological change model

Morphological evolution is determined by the difference of sediment entrainment and deposition that is calculated per grid cell at each time step. The equation used to calculate morphological change is written by

$$\frac{\partial z_b}{\partial t} = \sum_{i=1}^N \left(\frac{\partial z_b}{\partial t} \right)_i = \frac{1}{1-p} \sum_{i=1}^N (S_{D,i} - S_{E,i}) \quad (8)$$

where N is the number of grain size fractions.

2.4. Numerical method

Eq. (1) and Eq. (3) and Eq. (8) constitute the model system which is a shallow water non-linear system. In compact form, the governing equations can be expressed by

$$\frac{\partial \mathbf{U}}{\partial t} + \frac{\partial \mathbf{E}}{\partial x} + \frac{\partial \mathbf{F}}{\partial y} = \frac{\partial \tilde{\mathbf{E}}}{\partial x} + \frac{\partial \tilde{\mathbf{F}}}{\partial y} + \mathbf{S} \quad (9)$$

where

$$\mathbf{U} = \begin{bmatrix} \eta \\ hu \\ hv \\ hC_i \end{bmatrix}, \mathbf{E} = \begin{bmatrix} hu \\ hu^2 + \frac{1}{2}gh^2 \\ huv \\ huC_i \end{bmatrix}, \mathbf{F} = \begin{bmatrix} hu \\ huv \\ hv^2 + \frac{1}{2}gh^2 \\ hvC_i \end{bmatrix}, \tilde{\mathbf{E}} = \begin{bmatrix} 0 \\ hT_{xx} \\ hT_{xy} \\ \varepsilon_x h \frac{\partial C_i}{\partial x} \end{bmatrix}, \tilde{\mathbf{F}} = \begin{bmatrix} 0 \\ hT_{yx} \\ hT_{yy} \\ \varepsilon_y h \frac{\partial C_i}{\partial y} \end{bmatrix}$$

$$\mathbf{S} = \begin{pmatrix} 0 \\ -gh \frac{\partial z_b}{\partial x} - ghS_{fx} + \frac{\Delta \rho u}{\rho} \frac{\partial z_b}{\partial t} - \frac{\Delta \rho gh^2}{2\rho} \frac{\partial C}{\partial x} \\ -gh \frac{\partial z_b}{\partial y} - ghS_{fy} + \frac{\Delta \rho v}{\rho} \frac{\partial z_b}{\partial t} - \frac{\Delta \rho gh^2}{2\rho} \frac{\partial C}{\partial y} \\ (S_{E,i} - S_{D,i}) \end{pmatrix}$$

where \mathbf{U} is the vector of conserved variables; \mathbf{E} and \mathbf{F} are the flux vectors of the flow in the x and y directions respectively, $\tilde{\mathbf{E}}$ and $\tilde{\mathbf{F}}$ contain the turbulent terms in the x and y directions, \mathbf{S} is the source term vector.

The model is solved numerically by a well-balanced Godunov-type finite volume method (FVM) based on Cartesian coordinates. To update the variables in each cell, the following equation is used to update hydrodynamics:

$$\mathbf{U}_{i,j}^{n+1} = \mathbf{U}_{i,j}^n - \frac{\Delta t}{\Delta x} (\mathbf{E}_{i,j}^* - \tilde{\mathbf{E}}_{i,j}^*) - \frac{\Delta t}{\Delta y} (\mathbf{F}_{i,j}^* - \tilde{\mathbf{F}}_{i,j}^*) + \Delta t \mathbf{S}_{i,j} \quad (10)$$

where the vectors $\mathbf{E}_{i,j}^* = \mathbf{E}_{i+1/2,j}^* - \mathbf{E}_{i-1/2,j}^*$, $\mathbf{F}_{i,j}^* = \mathbf{F}_{i,j+1/2}^* - \mathbf{F}_{i,j-1/2}^*$ are the difference of the fluxes at the left and right interfaces of the cell (i, j) in the x and y direction; $\tilde{\mathbf{E}}_{i,j}^*$ and $\tilde{\mathbf{F}}_{i,j}^*$ represents the flux difference of turbulent and dispersion stresses at the left and right interfaces of the cell (i, j) in the x and y direction; Δt , Δx , Δy are the time step, cell size in the x and y direction, respectively. To calculate the first three flux terms (e.g. $\mathbf{E}_{lr\ 1,2,3}^*$), the Harten, Lax and van Leer (HLL) scheme has been used in this study. More details are described in Guan et al., (2014). Similar to updating the hydrodynamic variables, the sediment concentration is updated at the same cell and time step based on the sediment inter-cell flux \mathbf{C}^* as follows,

$$c_{i,j}^{t+\Delta t} = c_{i,j}^t - \alpha \left[\frac{\Delta t}{\Delta x} \left(c_{i+\frac{1}{2},j}^* - c_{i-\frac{1}{2},j}^* \right) + \frac{\Delta t}{\Delta y} \left(c_{i,j+\frac{1}{2}}^* - c_{i,j-\frac{1}{2}}^* \right) \right] + \Delta t S_{c(i,j)} \quad (11)$$

where t represents the time; S_c is the source term shown in the right hand side of Eq. (4). The sediment flux \mathbf{C}^* is calculated using the following equation,

$$\mathbf{C}^* = c^*(\vec{i} + \vec{j}) = \begin{cases} (\mathbf{E}_{lr}^*|_1 \vec{i} + \mathbf{F}_{lr}^*|_1 \vec{j}) c_l & S_* \geq 0 \\ (\mathbf{E}_{lr}^*|_1 \vec{i} + \mathbf{F}_{lr}^*|_1 \vec{j}) c_r & S_* < 0 \end{cases} \quad (12)$$

where c_l and c_r are the volumetric sediment concentration at the left and right cells; $\mathbf{E}_{lr}^*|_1$, $\mathbf{F}_{lr}^*|_1$ represent the flow intercell mass flux. S_* is the middle wave speed calculated by the equation of Toro (2001). A variable time step Δt , adapted to local flow conditions, is calculated at each time step based on a fixed Courant number (CFL) for stability ($0 < \text{CFL} < 1.0$).

3. Results and Discussion

3.1. Model validation

Three laboratory cases were used to verify the model capability in simulating morphological changes dominant by fine suspended load, which includes (1) sediment transport in a trench, (2) partial dam-breach flow over a mobile channel, and (3) localised erosion and deposition in a pond with erodible bed. In all three experimental cases, it has been observed that suspended load is the main transport mode, which ensures the applicability of the cases in the model

verification. Here the model errors with the measured data were quantified using the Brier Skill Score (BSS) as:

$$BSS = 1 - \frac{\sum_1^n (z_i^o - z_i^m)^2}{\sum_1^n (z_i^o - z_{i,t=0}^o)^2} \quad (13)$$

where superscripts m and o refer to modelled and observed point data, respectively, and n is the total number of point data.

3.1.1. Sediment Transport in a Trench

To verify the capability of the proposed model in predicting bed evolution under the conditions of unsteady flows a simulation was carried out to compare with experiments originally conducted at the Delft Hydraulics Laboratory to investigate the movable bed evolution caused by steady open channel flow (van Rijn, 1980). The trench is located in the middle of the 30m long channel. Three tests with different side slopes of the trench (1:3, 1:7 and 1:10) were performed in the experiments. Following van Rijn (1980), the key information of the three tests is listed in Table 1. The mean inflow velocity was 0.51 m/s at the inlet and the water depth were kept constant as 0.39 m. The erodible bed consists of fine sand with $d_{10} = 0.115$ mm, $d_{50} = 0.16$ mm and $d_{90} = 0.2$ mm. The sand density and porosity was 2,650 kg/m³ and 0.4 respectively. According to the experiment, the settling velocity of sediment particles was 0.013 m/s \pm 25%. A hindering settling velocity $\omega_0 = 0.015$ m/s is used. Manning's coefficient n is set to be 0.016. In addition, to maintain the sediment equilibrium conditions in the upstream, i.e. no scour or deposition occurring, sand with the same composition was fed at a constant rate of 0.04 kg/s/m; thereby, the suspended load transport rate was estimated to be 0.03 \pm 0.006 kg/s/m and the bed load transport rate of about 0.01 kg/s/m. The contribution of the suspended load transport to the total load transport was in the range of 60% to 90%.

For simulation, the whole domain is discretised by 150 cells with $\Delta x = 0.2$ m. To ensure steady flow, the model is run for 900s. After 900 s, sand is fed and bed evolution occurs. Van Rijn (1984) suggested estimating the reference level by the following equation, $a = \min[\max(k_s, 2d_{50}, 0.01h), 0.2h]$. Based on this formulation, $a = 0.01$ m and $a = 0.02$ m was used in the model to demonstrate the influence of the reference level. Figure 1 plots the

simulated velocity and depth-averaged measurement at the five measured sections. It can be seen that the model produces the velocity reasonably well around the trench. Also, the water surface has been simulated to be close to the real constant value 0.39m. Regarding the prediction of changes in bed profiles, Figure 2 indicates that the simulated bed profiles with $a = 0.01$ m and $a = 0.02$ m show similar shape with only a slight difference. With both reference levels, the simulated bed has a high Brier Skill Score which is over 0.9. When $a = 0.01$ m, the model gives a better results. Therefore, the model is also verified in Test 2 and Test 1 with the reference level $a = 0.01$ m. As shown in Figure 3, the general bed profiles at both 7.5hrs and 15 hrs are produced with a good BSS. This implies the capability of the model in simulating bed changes due to sediment transport dominant by suspended load.

3.1.2. Partial Dam-breach Flow over a Mobile Channel

To verify and validate the performance of the suspended load model it was used to reproduce partial dam-breach flow experiments over a mobile bed, which were carried out at the Hydraulics Laboratory of Tsinghua University, China (Xia et al., 2010). A thin dam was located 2.0m downstream of a 18.5 m \times 1.6 m rectangular flume, and a 0.2 m wide dam-breach centred at $y = 0.8$ m; the region of 4.5 m after dam site was covered by fine non-uniform coal ash with a median diameter of 0.135 mm, and its natural and dry density were measured approximately as 2248 kg/m³ and 720 kg/m³ respectively; the water depth was initially set to be 0.4 m in the reservoir and 0.12 m downstream of the dam. In this experiment, the bed levels at two cross sections CS1 ($x = 2.5$ m) and CS2 ($x = 3.5$ m) after 20s were measured. During the whole experiment, only suspended load transport occurs due to the particles being so fine. Table 2 lists the key parameters used in the simulation. For the simulation, the domain is discretised by 370 \times 80 cells, and the time interval is $\Delta t = 0.005$ s. The Manning's coefficient $n = 0.02$ s/[m^{1/3}]; the sediment porosity is set as 0.35. The suspended load model is run for 20s. Figure 4 shows a comparison between the observed and modelled cross-sectional profiles at 20s. It is shown that the trend of the predicted bed profiles is similar to that of the measured profiles. Erosion occurs in the middle of the cross sections. The bed erosion quantity is less than the measurement at CS1 where the predicted bed is underestimated, particularly in terms of the erosion width.

However, a similar maximum scour depth and location are predicted here. At CS2, the simulated and measured bed profiles are in good agreement with each other. The simulated and measured scour depths are very close and the erosion areas agree very well with each other, but the measured range of bed profile is about 20 cm wider than the simulated range. For this reason, it can be seen that the BSS for CS2 is relatively smaller. The bed deposition is underestimated by the model here. This is possibly due to either the experimental errors or the neglected turbulence term, which means the model may not be able to generate the rapid formation of horizontal circulating flow at the downstream of the dam. Figure 5 illustrates the contour plot of the simulated bed topography after 20s. Severe erosion occurs at the outlet of the dam, and the eroded suspended load is flushed to deposit downstream due to the decrease of bed shear stress.

3.1.3. Erosion and deposition in a pond with erodible bed

The experiment was conducted to investigate the erosion process in a rectangular basin due to clear water inflow from a narrow channel by Thuc (1991). In this test, the initial setup involves an inlet rectangular channel of 2.0m long and 0.2m wide, a rectangular movable basin with 5.0m long and 4.0m wide, and a 1.0m long and 1.2m wide channel in the downstream. Therein, the movable basin consists of fine sand with median diameter of 0.6mm, with a movable bed layer was 0.16m thick. For the initial hydraulic conditions, initial water depth was specified as 0.15m; the inflow velocity at the inflow boundary was kept constant at 0.6m/s, and the water depth at the outlet was a constant value of 0.15m. Only basin area is erodible during the experiment period. Table 3 show the key parameters of the experimental case. This experiment is simulated in this study because the sediment particle diameter is small (0.6 mm), and the rouse number of the case is estimated to be in a range of 0 - 2.4 in the main movable area, which means suspended load is the dominant transport mode. This fits the capability of the present model.

The length of channel is discretised with a constant interval $\Delta x = 0.1\text{m}$, but in width direction, the grid spacing around the centreline ($\pm 0.6\text{m}$) is set to be finer ($\Delta y_1 = 0.02\text{m}$) than that in other parts ($\Delta y_2 = 0.05\text{m}$). The computational mesh in the basin consists of 80×116 cells. The time step for flow and sediment calculation is set the same at 0.009 s. The Manning's roughness coefficient

n in the basin is given a value of $0.03 \text{ s/[m}^{1/3}]$. The model was run for 2 hours of experiment time. Eq. (4) is used to calculate the entrainment and deposition fluxes in this case. Figure 6 (a) shows the simulated bed change pattern around the inflow region at the centre part of the basin after 4 hours, and Figure 6(b) demonstrates the flow velocity field and bed shear stress. It can be seen that the inflow pipe has the biggest bed shear stress due to the high flow velocity, and the inflow pipe outfall area and the outlet area also have higher bed shear stress. Therefore, it can be seen that significant erosion occurs at the outfall area due to the inflow of clear water, then the eroded sediment moves downstream and deposits forming a hill. Since only basin area is erodible, no bed changes are found at the outlet area. Figure 7 further shows the comparison of the measured and simulated bed changes along the longitudinal centreline at 1 hour, 2 hours and 4 hours. All have a satisfying Brier Skill Score (BSS). Overall, the simulated morphological evolution tendency at 1 hour and 2 hours are in good agreement with the measured results. However, the maximum deposition heights are slightly under-predicted, with a 13.4% difference at 1 hour and 30.6% at 2 hours. Furthermore, it can be seen that the model overestimates the erosion depth at the inlet of the basin. There the simulated erosion is much more severe than the measured erosion. This is most likely because secondary flow plays an important role here; however, these non-hydrostatic flows are neglected in the current model.

3.2. Application in a stormwater pond

Stormwater ponds are characterised by urban runoff detention, runoff quality improvement and sediment trapping. The decrease in flow velocity and the low energy environment causes deposition of fine sediments delivered by urban flows as it enters the pond. Stormwater pond sedimentation leads to a decrease in pond storage capacity and triggers environmental and economic issues. The validated model is applied to a case study of a stormwater pond in Newcastle Great Park and based on the results, improved understanding of fine sediment dynamics is developed.

3.2.1. Study site

The study area is located in Ouseburn catchment (the black boundary in Figure 8a) in Newcastle upon Tyne in the UK. The stormwater pond connects the upstream newly built urban

development and the Ouseburn River. Figure 8c shows the simulated domain which is an area of 230m by 140m. It was observed that the pond is covered with dense vegetation which protects the local bed. For simulations, the flow discharge is input to the model via a pipe section as an upstream boundary. The other boundary is set to be free open which means that the floodwater can freely flow out based on the local flow conditions.

3.2.2. Model scenarios

Three scenarios were considered: non-flood (5 year), sewer design (30 year) and flood (100 year) (Figure 9a). Also, rainfall events in the extreme flow year 2012 with 15 minutes interval rainfall measurements at the Jesmond Dene gauging station (EA #19356) were used to conduct an annual sediment simulation, and the flow at the inlet for the identified rainfall events is quantified by using the physically-based conceptual rainfall-runoff model - the Revitalised Flood Hydrograph (ReFH) model (Figure 9b).

Allen *et al.* (2015) measured the continuous flow records from January to May 2015 at the pond's outfall. The ReFH rainfall runoff model is calibrated with the observed flow data sets by varying the drainage length parameter (DPLBAR) in the model. Based on the field survey, the fine sediment composes of three classes: $d_{10}=5\ \mu\text{m}$ (fine silt), $d_{50} = 12\mu\text{m}$ (fine silt) and $d_{90} = 50\mu\text{m}$ (silt) that were obtained from the manual sampling and equally distributed as an input in the upstream boundary. The fine sediment concentration is estimated based on the regression relationships between flow, turbidity and suspended sediment concentration from the analogue catchment (Ahilan *et al.*, 2016). In order to assess the relative impact of the pond on the hydrologic and morphologic responses during high flow events, two Digital Elevation Model (DEM) data sets were incorporated in the model setup. The current DEM represents existing topography ('with') pond condition and the DEM corresponding to the year 2000 represents the predevelopment stage ('without') pond scenario in the hydro-morphodynamic model. Table 4 lists the key information about this case study.

3.3. Model validation with sampling data

Allen *et al.* (2015) surveyed the cumulative sediment deposition at monthly intervals at six locations in the pond during the monitoring period, which is used to validate the morphodynamic

model in simulating sediment deposition in the pond. Flow events between 23/04/2015 to 26/05/2015 (as shown in Figure 10) were modelled because there are a number of high flow events over the period apart from low base flows. Figure 10 shows the simulated sediment deposition in the pond and the location of the six monitoring points. It indicates that the main deposition area is located at the outfall area. This is because the flow velocity sharply decreases after the water flows to the pond from upstream pipe, this leads to bed shear stress be so small that sediment particles settle down to the bed. Resuspension during high flows causes slight sedimentation in the far area from the outfall. Table 5 shows the measured and simulated depths at the six monitoring points. It is indicated that the model predicts the sedimentation in the stormwater pond generally well despite the fact that there are clear discrepancies at some points. These differences are expected because of the uncertainty factors in reality. The main uncertainty factors include: (1) the stormwater pond is covered by a variety of soft vegetation which causes clear implication on flow dynamics and sediment transport, however, this is difficult to quantify and predict; (2) the inflow discharge and sediment concentration are quantified based on a conceptual rainfall-runoff model and regression relationship between flow and turbidity, thus this brings about uncertainties in model inputs; (3) sediment particles are very fine, and the sedimentation depth is small, the field monitoring quantifies sediment weights rather depths which might cause some errors to quantify its real depth. Despite of the discrepancies, it can be seen that both simulated and measured shows a higher deposition near the outfall location and a smaller sedimentation at the far-point from the outfall. Therefore, considering the main objective of this study in developing better understanding of fine suspended load transport, the model results are deemed to be adequate.

3.4. Fine-grained sediment tracking during single events

The validated model is used in the hydro-morphological simulations during single events (5-year flow, 30-year flow, and 100-year flow). Figure 11 shows the water depths, suspended load concentration, and bed shear stress and velocity field during the flow peak for each scenario, as well as the resultant sediment deposition in the stormwater pond after each event. In the viewpoint of hydrodynamic effects, it is clear that the pond has the capability to store the 5-year

flow, and the sediment particles in the flow bodies are mostly trapped in the stormwater pond (Figure 11b) and gradually settle down in the stormwater pond because of the slow flow velocity and the low bed shear stress. However, during the 30-year and 100-year flow events (Figures 11f and j), a considerable amount of water flows from the pond into the river, which transports fine sediments downstream. As shown in Figures 11f and j, although the waters in the pond still have relative higher suspended load, sediment particles are flushed out to the river with the increasing inflow. This leads to deposition not only inside the pond, but also in the river downstream (Figures 11g and l). Table 6 quantifies the input sediments and the deposited sediments for the three scenarios. It shows that the increasing of inflow magnitude results in a decrease in sediment trapping efficiency of the pond as expected.

Before building the stormwater pond, the urban flows were directly drained into the river. The simulated results in Figure 12 clearly shows that the direct drainage to the watercourse leads to much wider inundation and sedimentation during flooding in comparison with that with the 'pond' in Figure 12. Consequently, sediment particles are deposited in the inundated areas after flood recession, as demonstrated in Figures 12f and j. Even for the more frequent 5-year flow event, the direct drainage causes considerable amount of sedimentation in the river channel. If there is any, the contaminants attached with sediment particles will potentially influence the water quality in the receiving water. Therefore, the simulations imply that the stormwater pond has the benefits of retaining urban flows and trapping sediment particles generated from upstream urban catchment. The model is capable of quantitatively simulating and qualitatively assessing the performance of a stormwater pond in managing urban floods.

3.5. Fine sediment dynamics varying with flows

As indicated in Table 4, an extreme event in year, 2012, was simulated by the validated model in order to numerically investigate the fine sediment response to an extreme flood event. Figure 13 plots the inflow at the pond inlet and the cumulative sediment deposition over the whole period in the study domain. Clearly, we can see a non-linear relationship between inflow discharge and cumulative deposition which demonstrates two distinctively different response modes: (1) steadily rising (e.g. zone 1 in Figure 13a), and (2) sharply dropping (zone 2 in Figure 13a). To

look at the trend of change in deposition volume and the inflow discharge in Figure 13b, we found that a high inflow leads to a sharp increase in deposition, and consistent low flows increase the sedimentation, but with a lower rate. However, the extreme flows in Figure 13b reduce the deposition volume sharply, and the higher the inflow, the more significant the reduction is.

Figure 14 further demonstrates the changes of pond sedimentation due to the three selected representative events in the year 2012 (Event 1, 2, and 3 in Figure 13). It is found that a considerable amount of sediment is trapped during Event 1, whilst the extreme Events 2 and 3 re-suspend the deposited sediment and transport them to the downstream, particularly in the area facing the pipe outlet. The behaviour is similar to the laboratory event reported in Section 3.1.3. At the pipe outlet bed shear stress is sufficiently high to cause re-suspension of sediments. The two different response modes observed during varying flow conditions raise a hypothesis, that is: sediment deposition in the pond increases with the inflow discharge, but after a critical value where there is a balance between erosion and deposition, the bed will be eroded due to the high bed shear stress, and the erosion rate is proportional to the inflow magnitude.

To verify the hypothesis raised above, we picked out 24 different flow events with a flow peak varying from $0.2 \text{ m}^3/\text{s}$ to $10 \text{ m}^3/\text{s}$ from the extreme year 2012, and quantified the deposition volume before and after each event. Figure 15 plots the scatter points between the change in deposition volume and flow peak for each event, and the trendlines among the points. It can be seen that two trendlines are derived as postulated, and both have a good determination coefficient, R^2 , that is larger than 0.8. The deposition volume has a linear relation with a high determination coefficient (0.8775) with the flow discharge. The linear relationship of erosion volume and flow discharge is also significant, but there is a clear large difference during extreme high flows (see Figure 15). These two events with significant difference are event 2 and event 3 in Figure 14. With a similar high flow, event 2 has more severe erosion than event 3. This is because there is significant deposition in the pond before event 2 occurs, which allows more sediment to be re-suspended during the extreme flow of event 2. However event 3 occurs about 110 hours after event 2, the deposited sediment available for re-suspension is clearly much less than the pre-event2 volume. Therefore, this leads to a significant bias for the two events with

similar high flow discharge. We found that there is a critical value defined as 'balance point' of the flow peak, and the value is approximately in a range of 1.79 – 1.96 m³/s for the studied stormwater pond. In other words, sediment deposition in the stormwater pond increases with the inflow, and the rate is proportional to the flow peak when the flow peak is below the balance point; however, for the flow with a peak above the balance point, fine sediment particles will be re-suspended and transported downstream, and the re-suspension rate is proportional to the flow peak. Clearly, this balance point is a transition value causing bed deposition or erosion in the pond. This point provides a valuable indicator for stormwater ponds design and maintenance. Removing sediment from stormwater ponds is needed periodically to maintain proper function and restore capacity to prevent localised flooding. Traditionally machinery dredging is one option during dry conditions (EPA, 2009). However, the understanding of ponds' balance point can suggest a natural hydraulic regulation method, so saving maintenance cost, and sediments transporting to downstream can also improve the river habitat. Similar hydraulic regulation method has been used for sustainable sediment management in reservoirs (Kondolf, et al., 2014). It should be mentioned that the actual changes in sedimentation volume are also related to inflow volume in addition to flow peak, because a larger flow volume means more fine sediments discharging into the pond. Nonetheless, the flow peak is the deterministic factor causing fine sediments either to be deposited in the pond or to be flushed out of the pond.

4. Conclusions

The study has developed a numerical model to track the hydro-morphological processes dominated by fine-grained suspended sediment, including the prediction of sediment concentration in flow bodies, and erosion and deposition caused by sediment transport. The model has been validated with three laboratory-scale test cases where suspended load plays a dominant role. The results show that the model is capable of reproducing the flow dynamics and the resultant morphological changes reasonably well. Applications in real-world events are performed to further develop the process-based understanding of fine sediment activities in a stormwater pond during varying flow conditions. Findings drawn from this study include: (1) a stormwater pond can be used to attenuate flow peak and trap fine sediment particles, and the

effect is more significant for flow events with a smaller flow peak; (2) a balance point for the inflow peaks determines whether fine sediments settled down or are re-suspended, and the value is determined in a range of 1.79 – 1.96 m³/s for the studied pond; (3) the consistent low flows lead to gradual accumulation of sediment particles in the pond, and each rainfall-induced flow event results in a sharp rising in the deposition volume below the balance point, but above the value, the high flow event will flush away the sedimentation in the pond; and (4) the model is capable of quantitatively simulating and qualitatively assessing the performance of a stormwater pond in managing urban water quantity and quality.

Acknowledgements

The work is supported by the UK EPSRC grant (No. EP/K013661/1) and the open fund grant (No. SKHL1607) from Sichuan University. The authors thank Environment Agency for providing rainfall, DTM and land-use data sets for the stormwater pond case study.

References

- Abad, J.D., Buscaglia, G.C., Garcia, M.H., 2008. 2D stream hydrodynamic, sediment transport and bed morphology model for engineering applications. *Hydrological Processes* 22(10) 1443-1459.
- Ahilan, S., Guan, M., Sleigh, A., Wright, N. and Chang, H., 2016. The Influence of Floodplain Restoration on Flow and Sediment Dynamics in an Urban River. *Journal of Flood Risk Management*. DOI: 10.1111/jfr3.12251
- Allen, D., Arthur, S., Haynes, H. and Olive, V., 2017. Multiple rainfall event pollution transport by sustainable drainage systems: the fate of fine sediment pollution. *International Journal of Environmental Science and Technology*, 14, 3, 639-652.
- Allen, D., Olive, V., Arthur, S. and Haynes, H., 2015. Urban Sediment Transport through an Established Vegetated Swale: Long Term Treatment Efficiencies and Deposition. *Water*, 7(3), 1046- 1067.
- Bohorquez, P. and Fernandez-Feria, R., 2008. Transport of suspended sediment under the dam - break flow on an inclined plane bed of arbitrary slope. *Hydrological processes*, 22(14), pp.2615-2633.

- Begnudelli, L., Valiani, A., Sanders, B.F., 2010. A balanced treatment of secondary currents, turbulence and dispersion in a depth-integrated hydrodynamic and bed deformation model for channel bends. *Advances in Water Resources* 33(1) 17-33.
- Birch, G.F., Matthai, C. and Fazeli, M.S. (2006) Efficiency of a retention/detention basin to remove contaminants from urban stormwater. *Urban Water Journal*, 3(2), 69-77,
- Cao, Z., Pender, G., Wallis, S., and Carling, P., 2004. Computational dam-break hydraulics over erodible sediment bed. *Journal of Hydraulic Engineering*, 130(7), 689–703.
- Costabile, P. and Macchione, F., 2015. Enhancing river model set-up for 2-D dynamic flood modelling. *Environmental Modelling & Software*, 67 89-107.
- Crosa, G., Castelli, E., Gentili, G., and Espa, P., 2010. Effects of suspended sediments from reservoir flushing on fish and macroinvertebrates in an alpine stream. *Aquatic Sciences*, 72(1), 85–95.
- Dadson, S., Hall, J., Murgatroyd, A., Acreman, M., Bates, P., Beven, K., Heathwaite, L., Holden, J., Holman, I., Lane, S., O'Connell, E., Penning-Rowsell, E., Reynard, N., Sear, D., Thorne, C., Wilby, R., 2017. A restatement of the natural science evidence concerning catchment-based 'natural' flood management in the United Kingdom. *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences*, 473 (2199).
- Duan, J.G. and Nanda, S.K., 2006. Two-dimensional depth-averaged model simulation of suspended sediment concentration distribution in a groyne field. *Journal of Hydrology*, 327(3), 426-437.
- Eekhout, J.P., Hoitink, A.J., de Brouwer, J.H. and Verdonchot, P.F., 2015. Morphological assessment of reconstructed lowland streams in the Netherlands. *Advances in Water Resources*, 81, 161-171.
- United States Environmental Protection Agency, Stormwater wet pond and wetland management guidebook, February 2009, <https://www3.epa.gov/npdes/pubs/pondmgmtguide.pdf>.
- Guan, M., N. Wright, P. Sleight, 2013. A robust 2D shallow water model for solving flow over complex topography using homogenous flux method, *International Journal for Numerical Methods in Fluids*, 73(3), 225-249.
- Guan, M., Wright, N., Sleight, P., 2014. 2D Process based morphodynamic model for flooding by non-cohesive dyke breach. *Journal of Hydraulic Engineering*, 140 (7).
- Guan, M., Wright, N., Sleight, P., 2015. Multimode morphodynamic model for sediment-laden flows and geomorphic impacts. *Journal of Hydraulic Engineering*, 141 (6).

- Guan, M., Wright, N.G., Sleigh, P.A., Carrivick, J.L., 2015b. Assessment of hydro- morphodynamic modelling and geomorphological impacts of a sediment- charged jökulhlaup, at Sólheimajökull, Iceland. *J. Hydrology* 530, 336-349.
- Guertault, L., Camenen, B., Peteuil, C., Paquier, A. and Faure, J.B., 2016. One-Dimensional Modeling of Suspended Sediment Dynamics in Dam Reservoirs. *Journal of Hydraulic Engineering*, 142(10).
- Hou, J., Liang, Q., Zhang, H. and Hinkelmann, R., 2015. An efficient unstructured MUSCL scheme for solving the 2D shallow water equations. *Environmental Modelling & Software*, 66, 131-152.
- Hu, P. and Cao, Z., 2009. Fully coupled mathematical modeling of turbidity currents over erodible bed. *Advances in Water Resources*, 32(1), 1-15.
- Hu, P., Cao, Z., Pender, G. and Tan, G., 2012. Numerical modelling of turbidity currents in the Xiaolangdi reservoir, Yellow River, China. *Journal of Hydrology*, 464, 41-53.
- Jartun, M., Ottesen, R.T., Steinnes, E. and Volden, T. (2008) Runoff of particle bound pollutant from 2230 urban impervious surfaces studied by analysis of sediment from stormwater traps. *Science of The Total Environment*, 396(2-3), 147-163.
- Janocko, M., Cartigny, M.B.J., Nemec, W. and Hansen, E.W.M., 2013. Turbidity current hydraulics and sediment deposition in erodible sinuous channels: laboratory experiments and numerical simulations. *Marine and Petroleum Geology*, 41, 222-249.
- Jones A, Stovin V, Guymer I, Gaskell P, Maltby L (2008) Modelling temporal variation sin the sediment concentrations in highway runoff. In: *Proceedings from the 11th international conference on urban drainage*, Edinburgh, UK
- Kondolf, G.M., Gao, Y., Annandale, G.W., Morris, G.L., Jiang, E., Zhang, J., Cao, Y., Carling, P., Fu, K., Guo, Q. and Hotchkiss, R., 2014. Sustainable sediment management in reservoirs and regulated rivers: Experiences from five continents. *Earth's Future*, 2(5), 256-280.
- Liu, J., Minami, S., Otsuki, H., Liu, B., and Ashida, K. (2004). "Environ- mental impacts of coordinated sediment flushing." *Journal of Hydraulic Research*, 42(5), 461–472.
- Owens, P. N., et al. (2005). "Fine-grained sediment in river systems: Environmental significance and management issues." *River Res. Appl.*, 21(7), 693–717.
- Saeedi M, Daneshvar S, Karbassi AR (2004) Role of riverine sediment and particulate matter in adsorption of heavy metals. *International Journal of Environmental Science Technology* 1(2),135–140.

- Simpson, G., and Castelltort, S., (2006). Coupled model of surface water flow, sediment transport and morphological evolution." *Computational Geosciences*, 32(10), 1600–1614.
- Soulsby, R., 1997. *Dynamics of marine sands: a manual for practical applications*. Thomas Telford, London, UK.
- Thuc, T. 1991. Two-dimensional morphological computations near hydraulic structures, Doctoral Dissertation, Asian Institute of Technology, Bangkok, Thailand.
- Toro, E. F. (2001), *Shock-Capturing Methods for Free-Surface Shallow Flows* 326 pp., John Wiley & Sons, LTD.
- Vacondio, R., Dal Palù, A. and Mignosa, P., 2014. GPU-enhanced Finite Volume Shallow Water solver for fast flood simulations. *Environmental Modelling & Software*, 57, 60-75.
- van Rijn, L.C., 1980. Computation of siltation in dredged trench, Report No. 1267-V, Delft Hydraulic Laboratory, Delft, The Netherlands.
- Van Rijn, L.C., 1984. Sediment transport part II, suspended load transport, *Journal of Hydraulic Engineering-ASCE*, 110(11), 1613-1641.
- Vörösmarty CJ, Meybeck M, Fekete B, Sharma K, Green P, Syvitski JPM., 2003. Anthropogenic sediment retention: major global impacts from registered river impoundments. *Global and Planetary Change*, 39,169–190.
- Wood, P. J., and Armitage, P. D. (1997). Biological effects of fine sediment in the lotic environment. *Environmental Management*, 21(2), 203–217.
- Wu, W., 2004. Depth-averaged two-dimensional numerical modeling of unsteady flow and nonuniform sediment transport in open channels. *Journal of Hydraulic Engineering-ASCE* 130(10) 1013-1024.
- Xia J, B Lin, RA Falconer, G Wang. 2010. Modelling dam-break flows over mobile beds using a 2D coupled approach. *Advances in Water Resources*, 33, 171-83.
- Zech, Y., Soares-Frazao, S., Spinewine, B., and Grelle, N. L., 2008. Dam- break induced sediment movement: Experimental approaches and numerical modelling. *Journal of Hydraulic Research*, 46(2), 176–190.

Figure captions

Figure 1 Depth-averaged measured velocity and simulated velocity at the equilibrium state for Test 3

Figure 2 Simulation results for different reference levels at 7.5 h and 15 h

Figure 3 Simulated and measured bed profiles for (a) Test 2 and (b) Test 1

Figure 4 Comparison between measured and simulated bed profiles at CS1 and CS2

Figure 5 Bed topography contour at 20s

Figure 6 (a) bed topography contour, and (b) bed shear stress and velocity field at 2hrs

Figure 7 Comparison between measured and simulated bed profiles at the centerline

Figure 8 (a) Newcastle Great Park Development Site, (b) the built stormwater ponds along the river, (c) the simulated domain

Figure 9 (a) flow hydrographs at the inlet of the stormwater pond with different recurrence intervals, (b) flow and sediment concentration for the 2012 recorded flow

Figure 10 Simulated sediment deposition in the stormwater pond


Figure 11 Simulated water depths (a,e,i), suspended concentration (b,f,j), and bed shear stress and velocity field (c,g,k) during flow peak, as well as sedimentation in the stormwater pond (d,h,l) for the 5-year (a-c), 30-year (d-f), and 100-year (g-i) events


Figure 12 Simulated water depths (a, d, g), bed shear stress and velocity field during peak flow (b, e, h), and sedimentation (c, f, i) for the 5-year, 30-year and 100-year flow events for the 'without' pond scenarios



Figure 13. Cumulative deposition volume and the inflow discharge over the cumulative flow time, (a) the full simulation period of 2012 (23/04/2012-26/05/2012), (b) zone 1, (c) zone 2.


Figure 14. Sediment deposition in the stormwater pond before and after events 1, 2 and 3 occur


Figure 15 The relationship of flow peak and sedimentation volume, note: positive value represents the deposition, negative value means the erosion


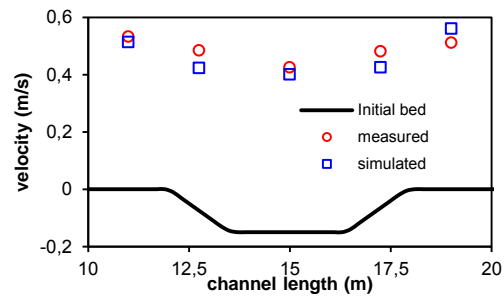


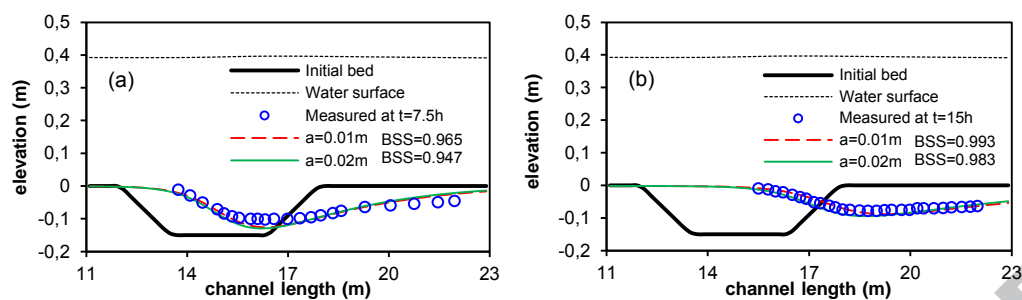


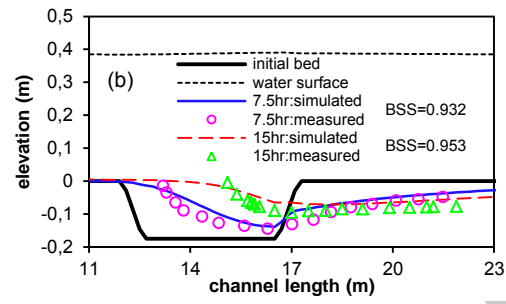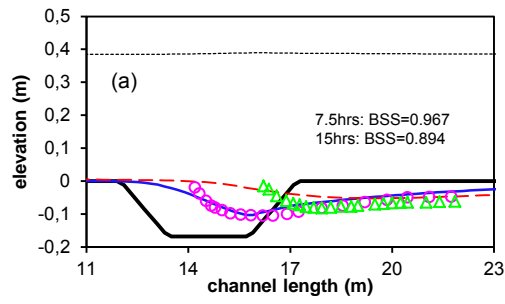


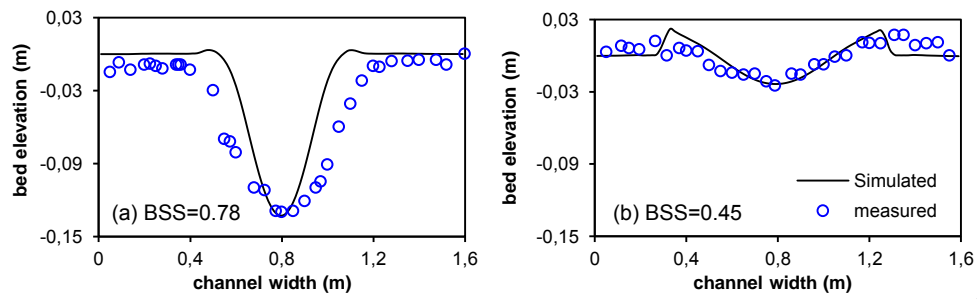


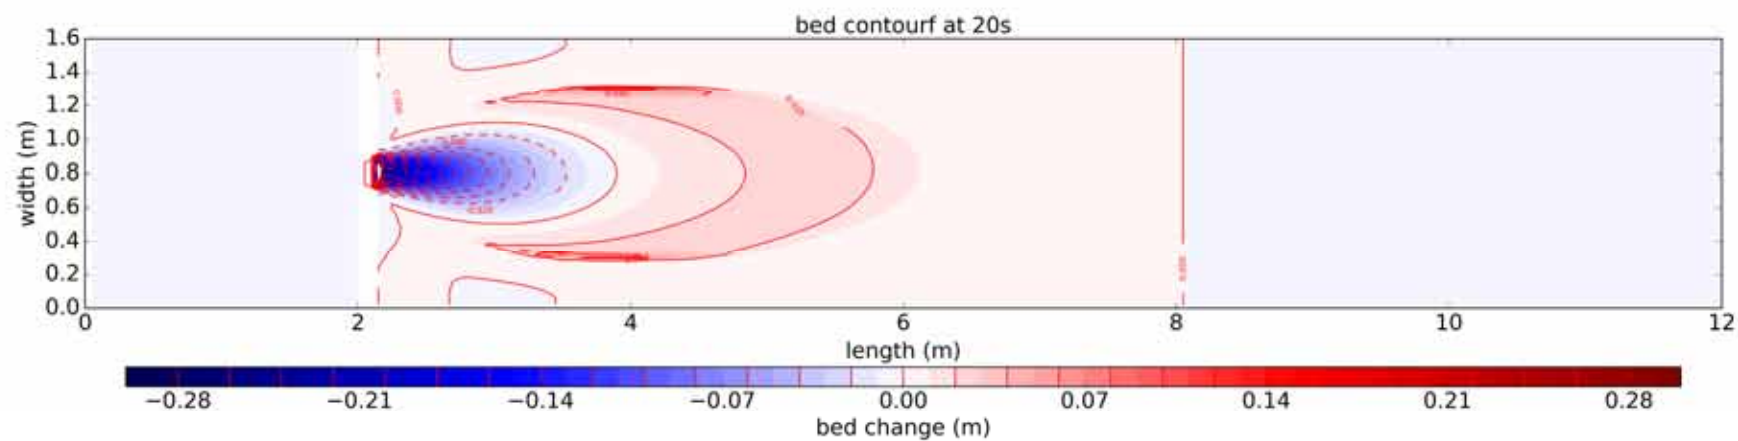




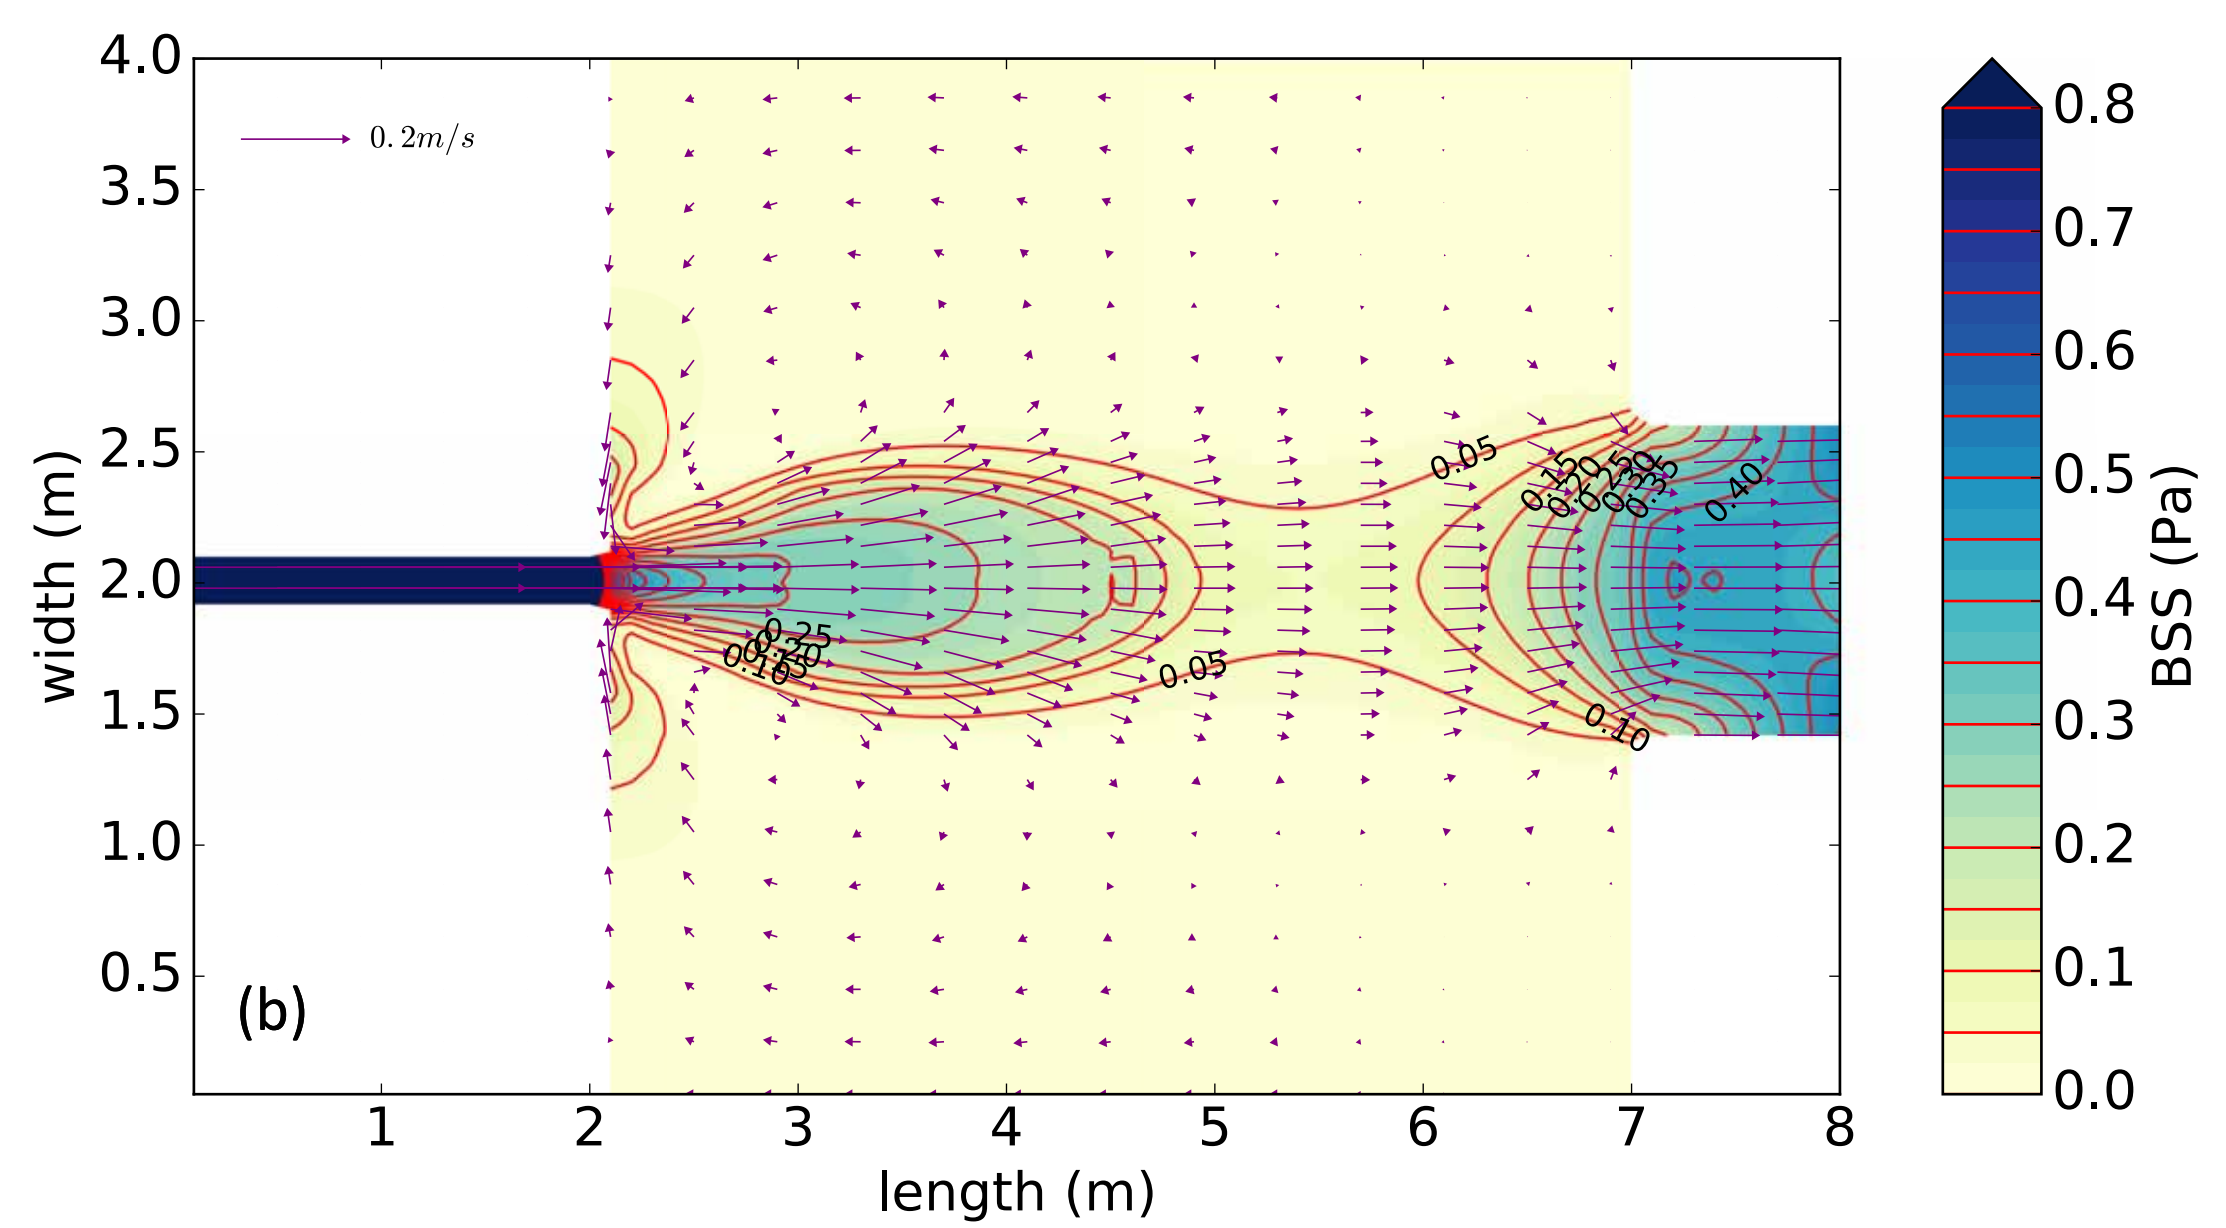
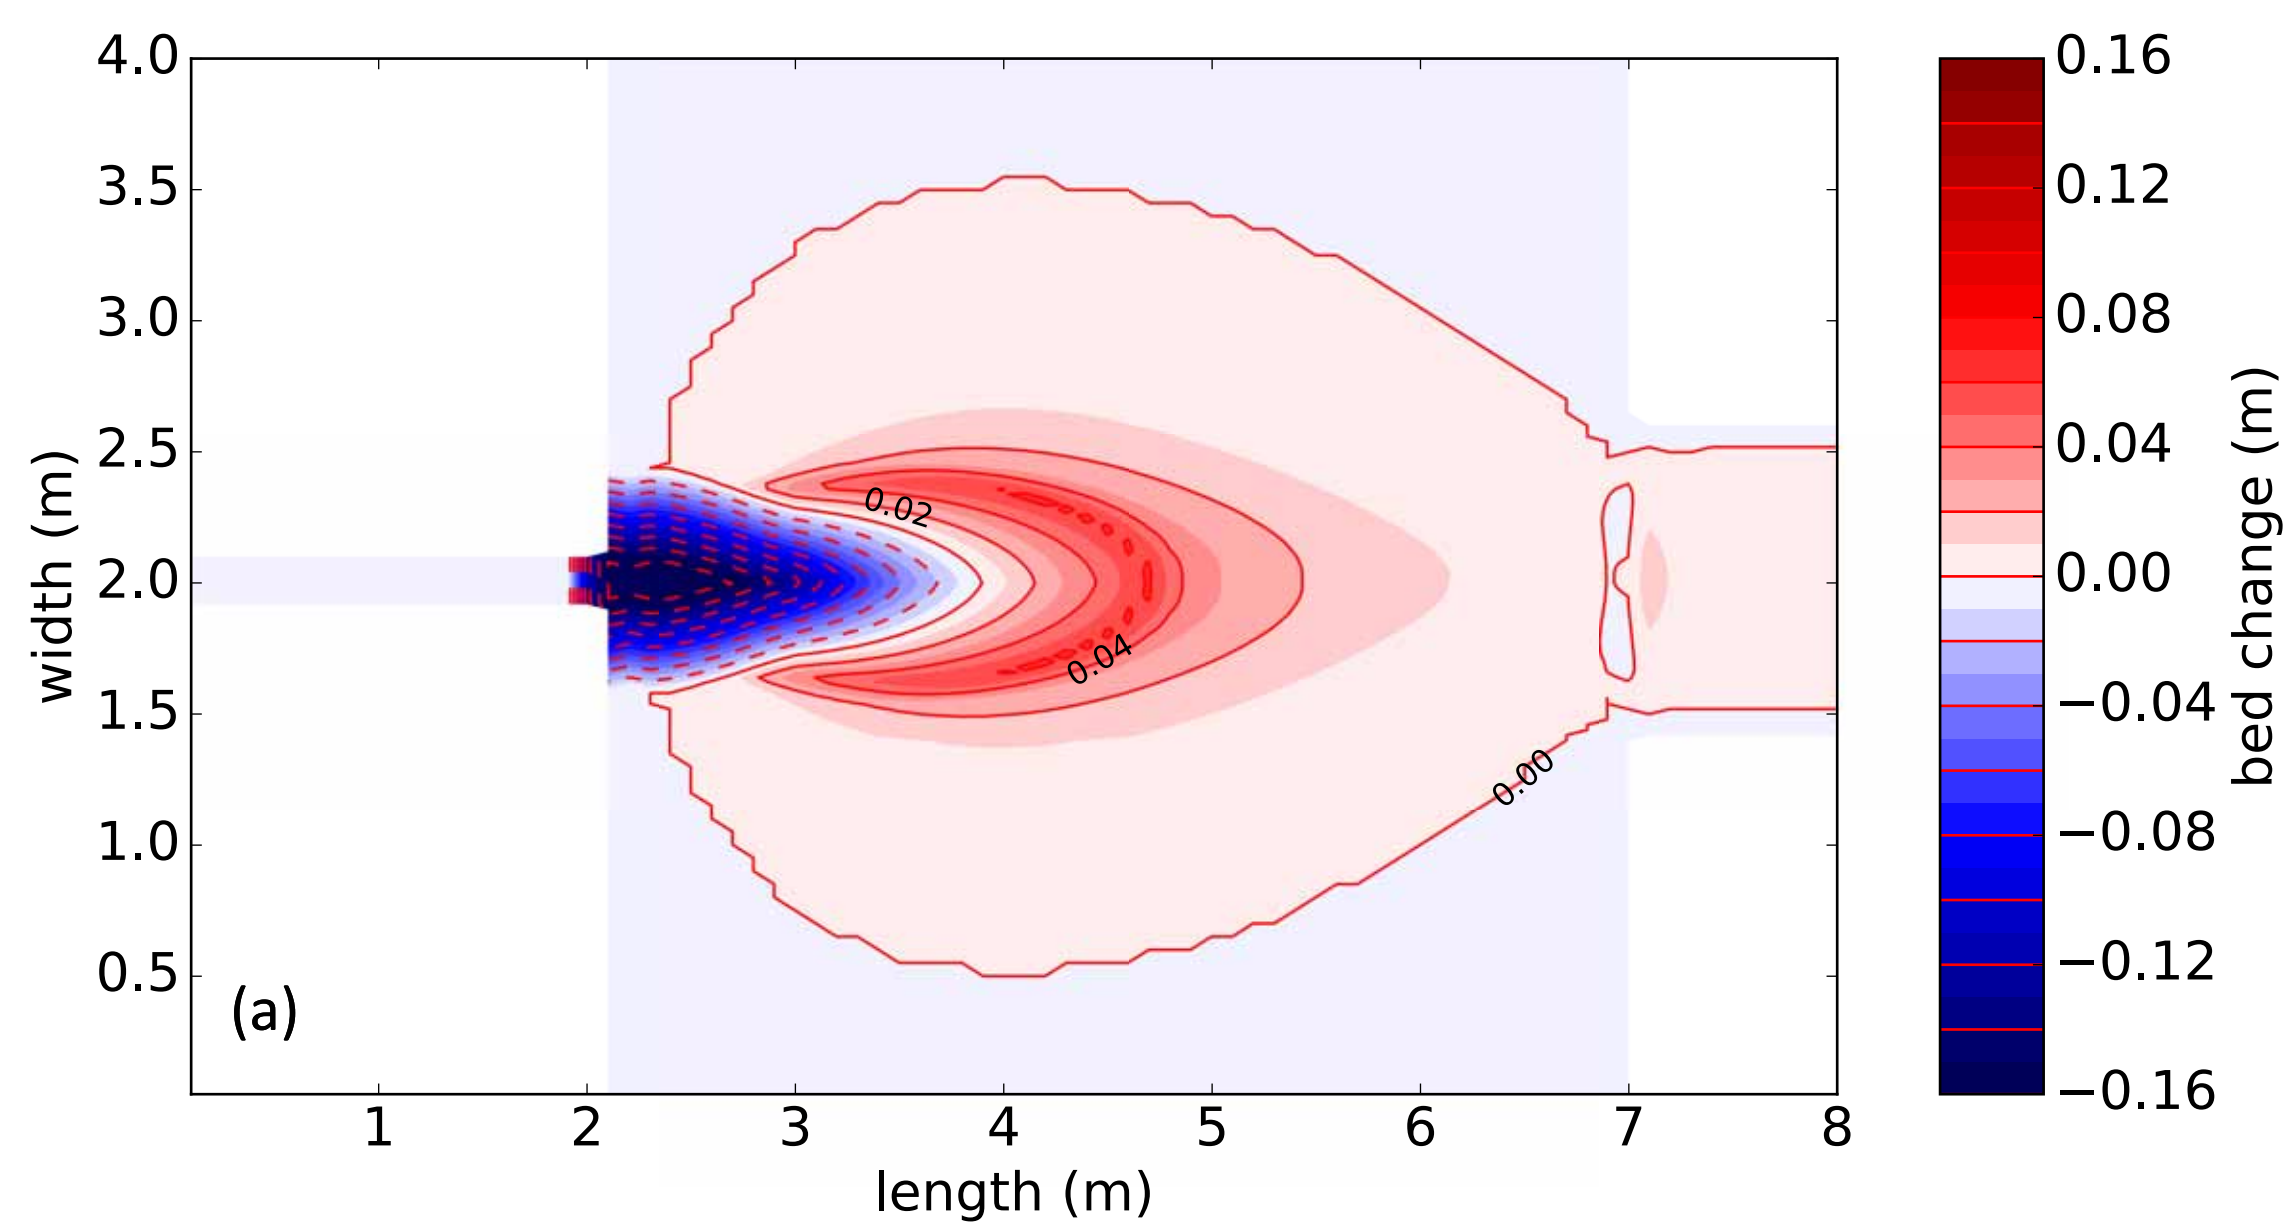





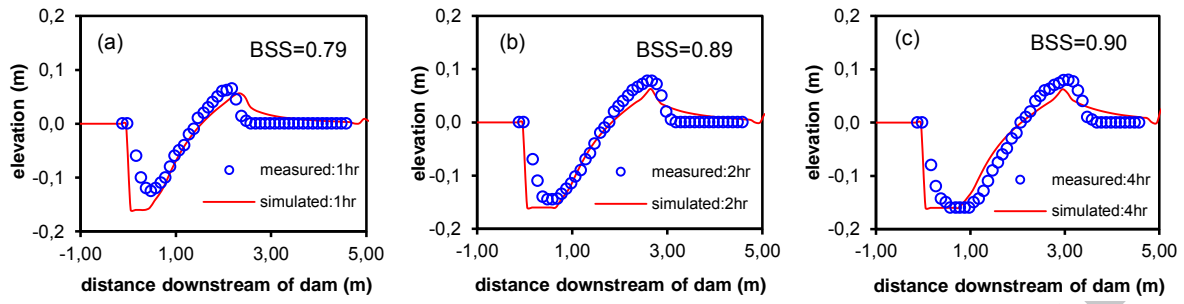





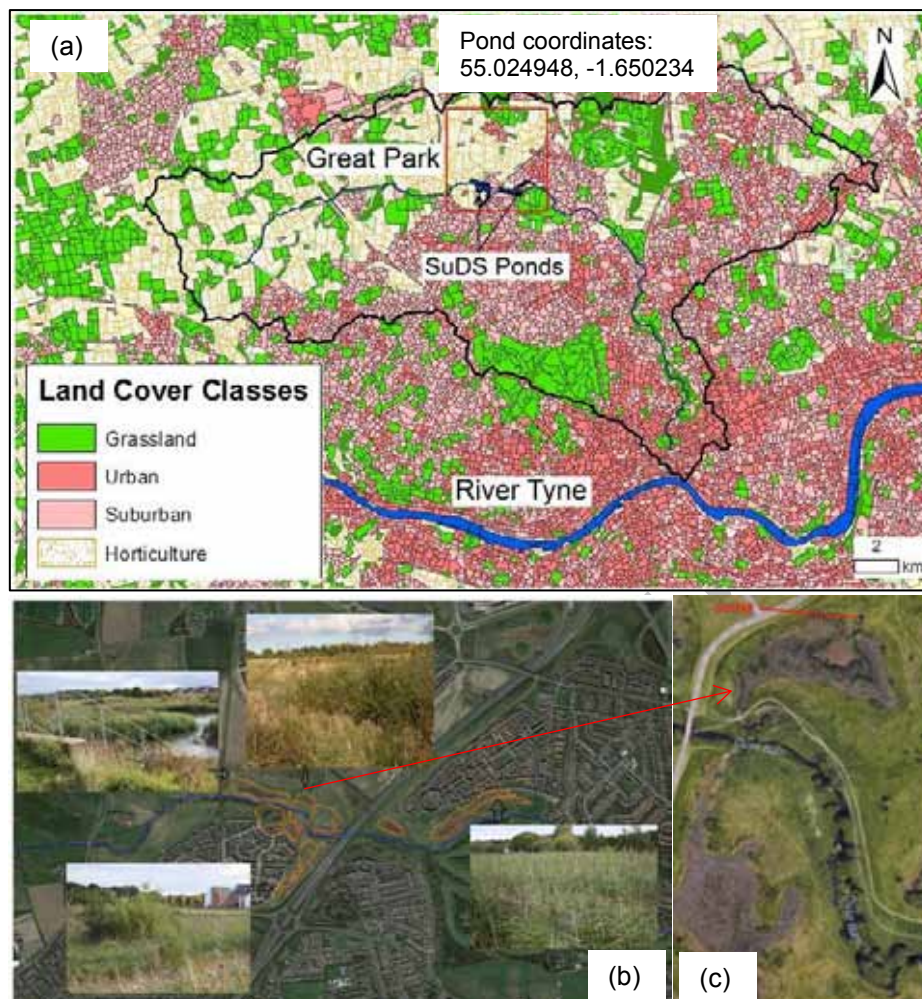




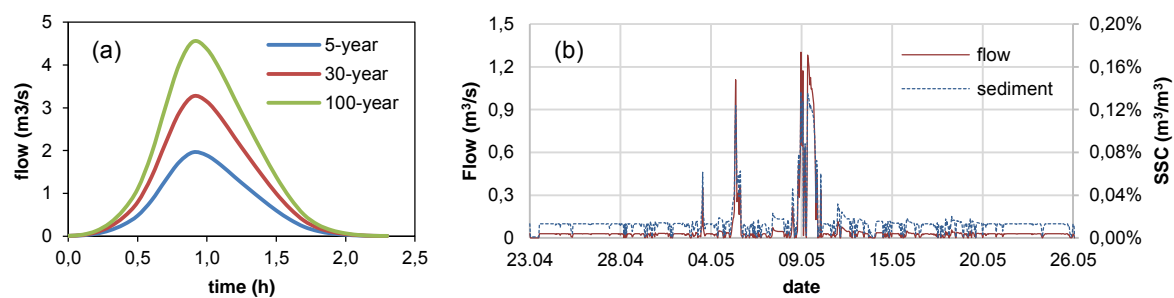




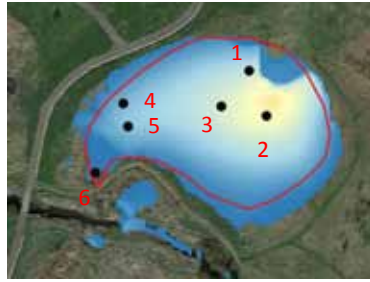


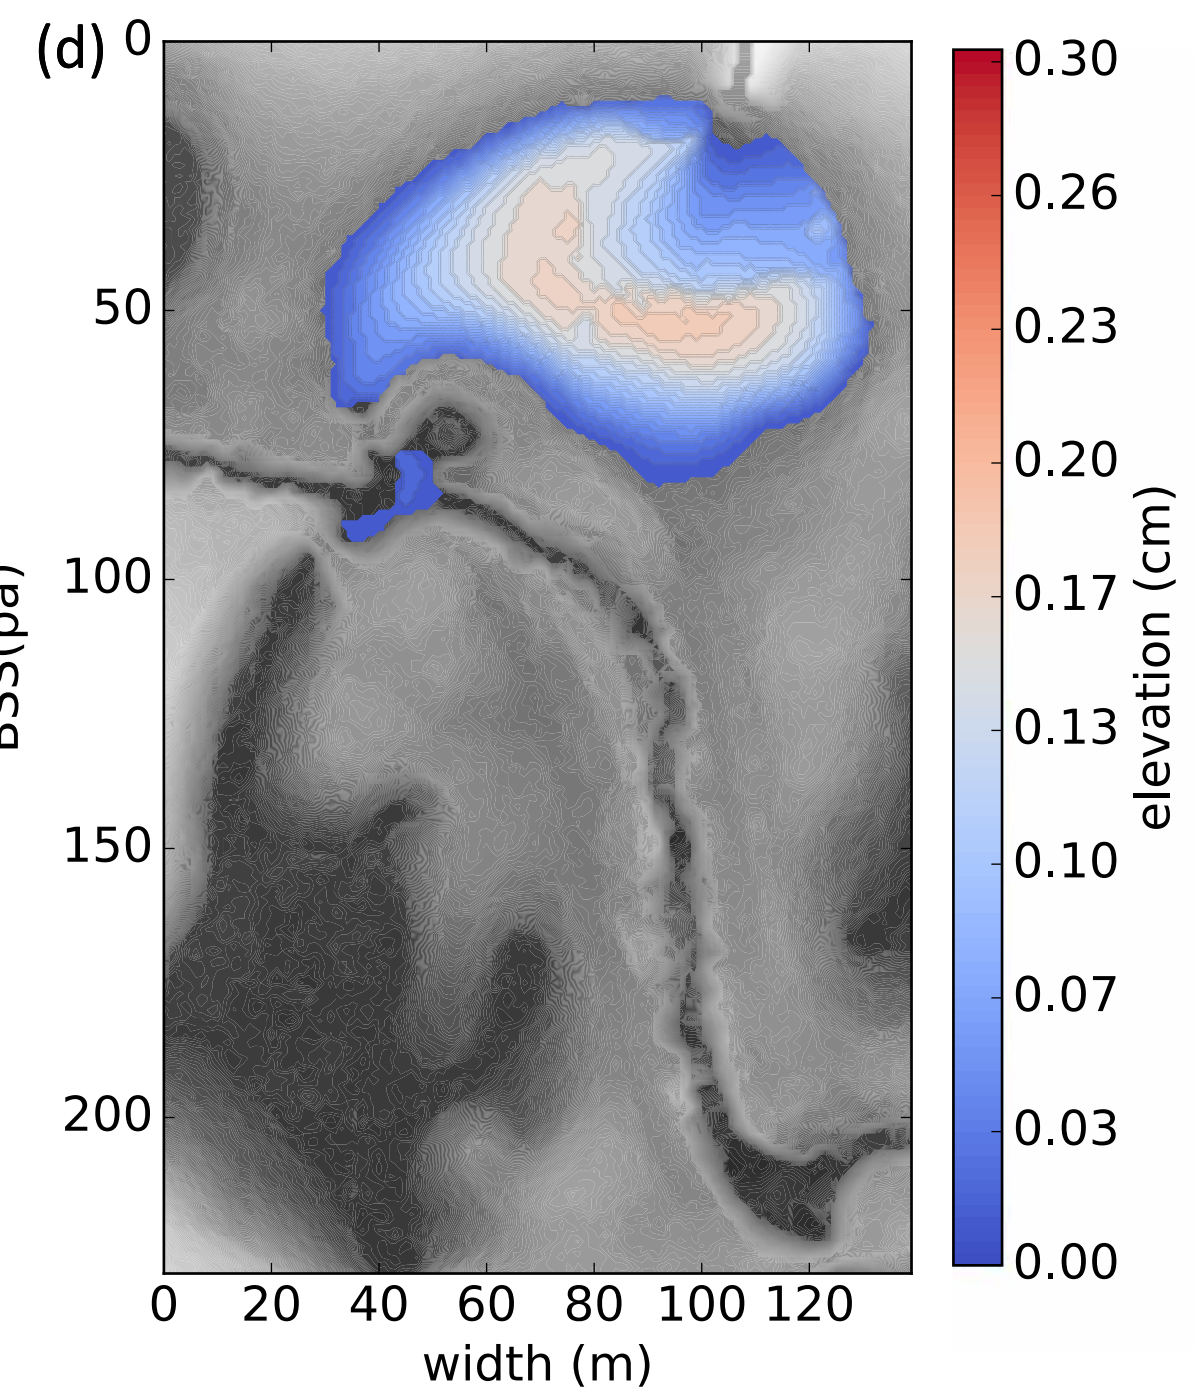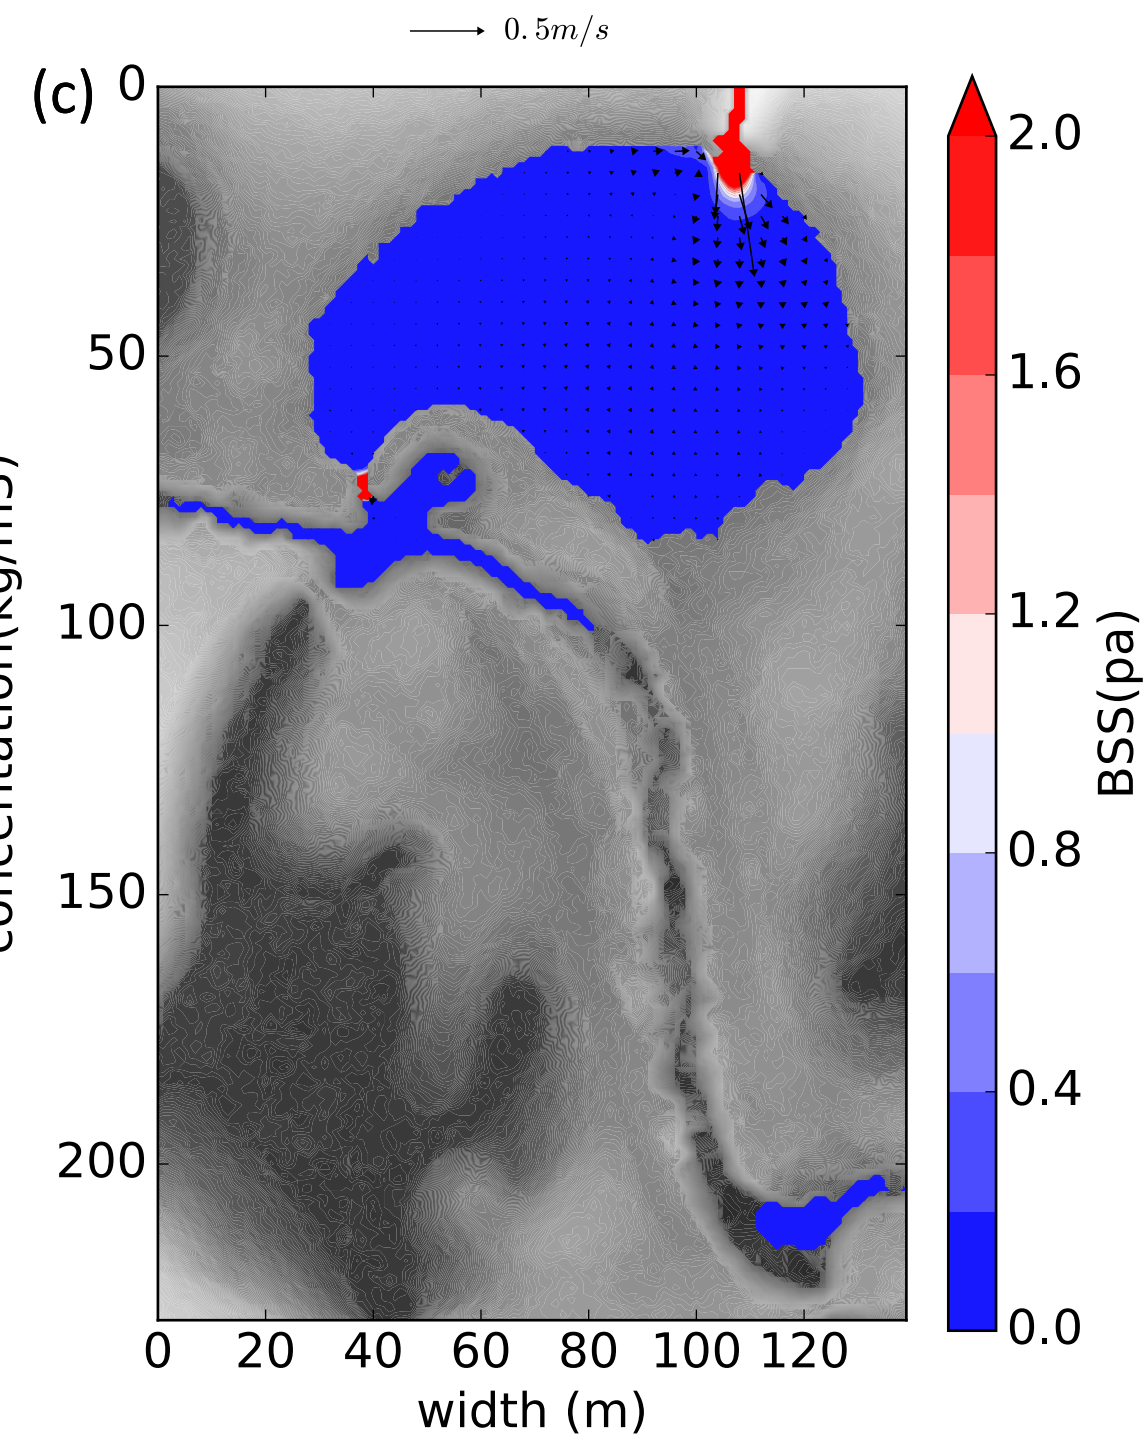
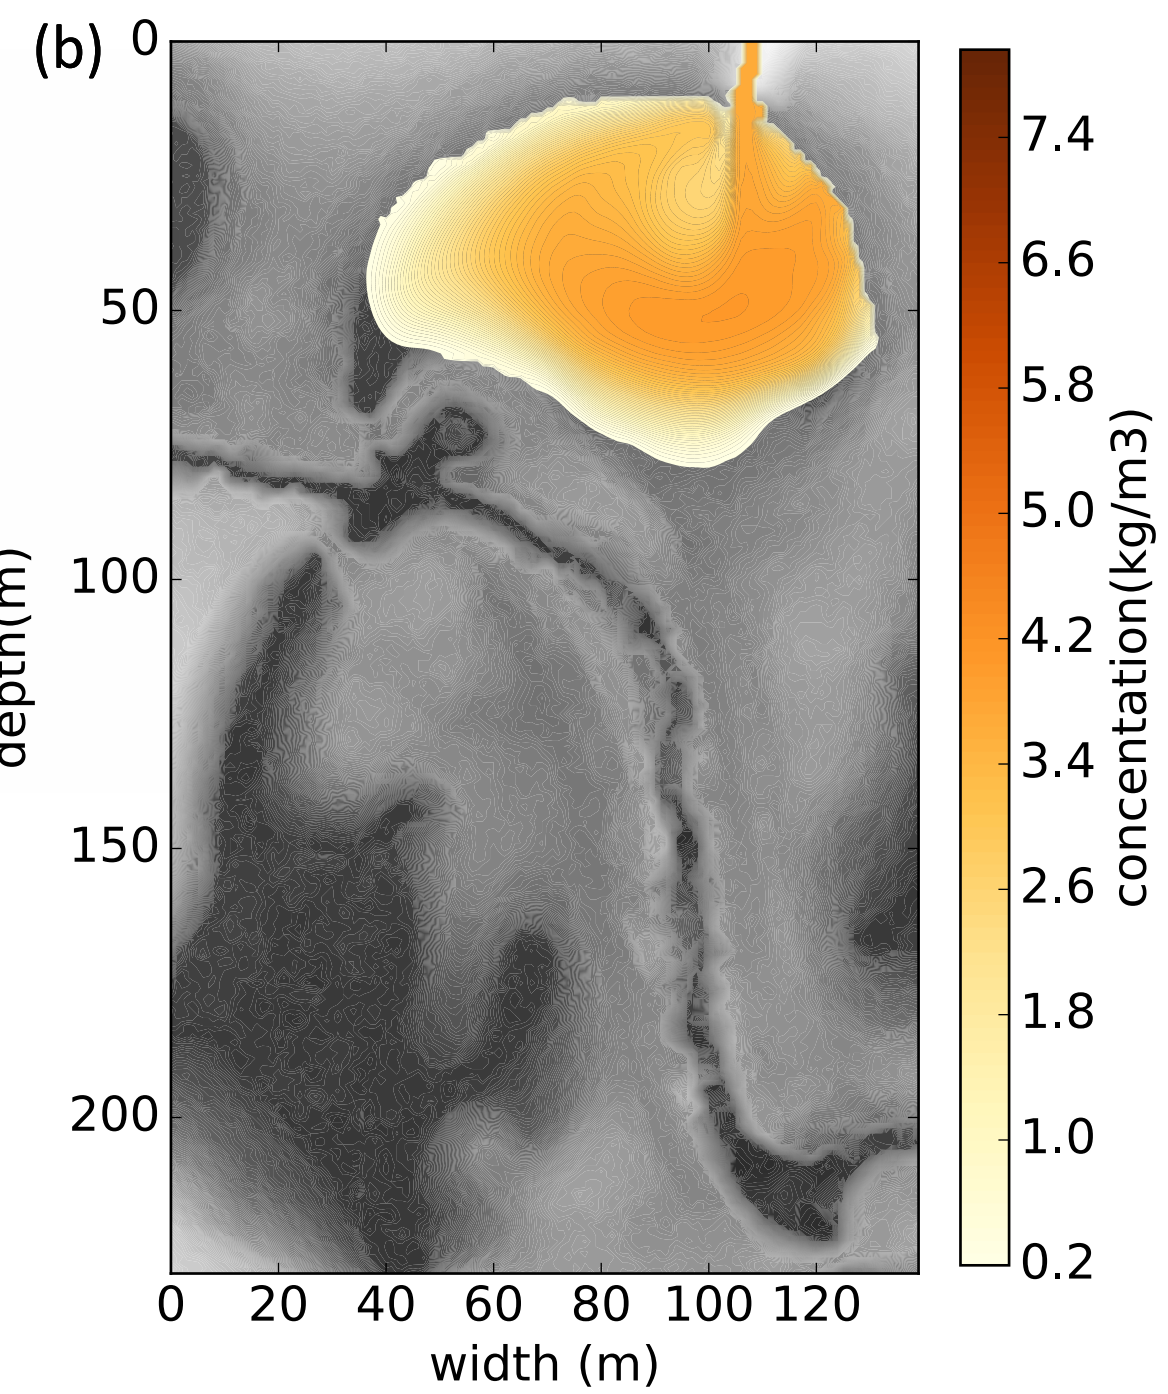
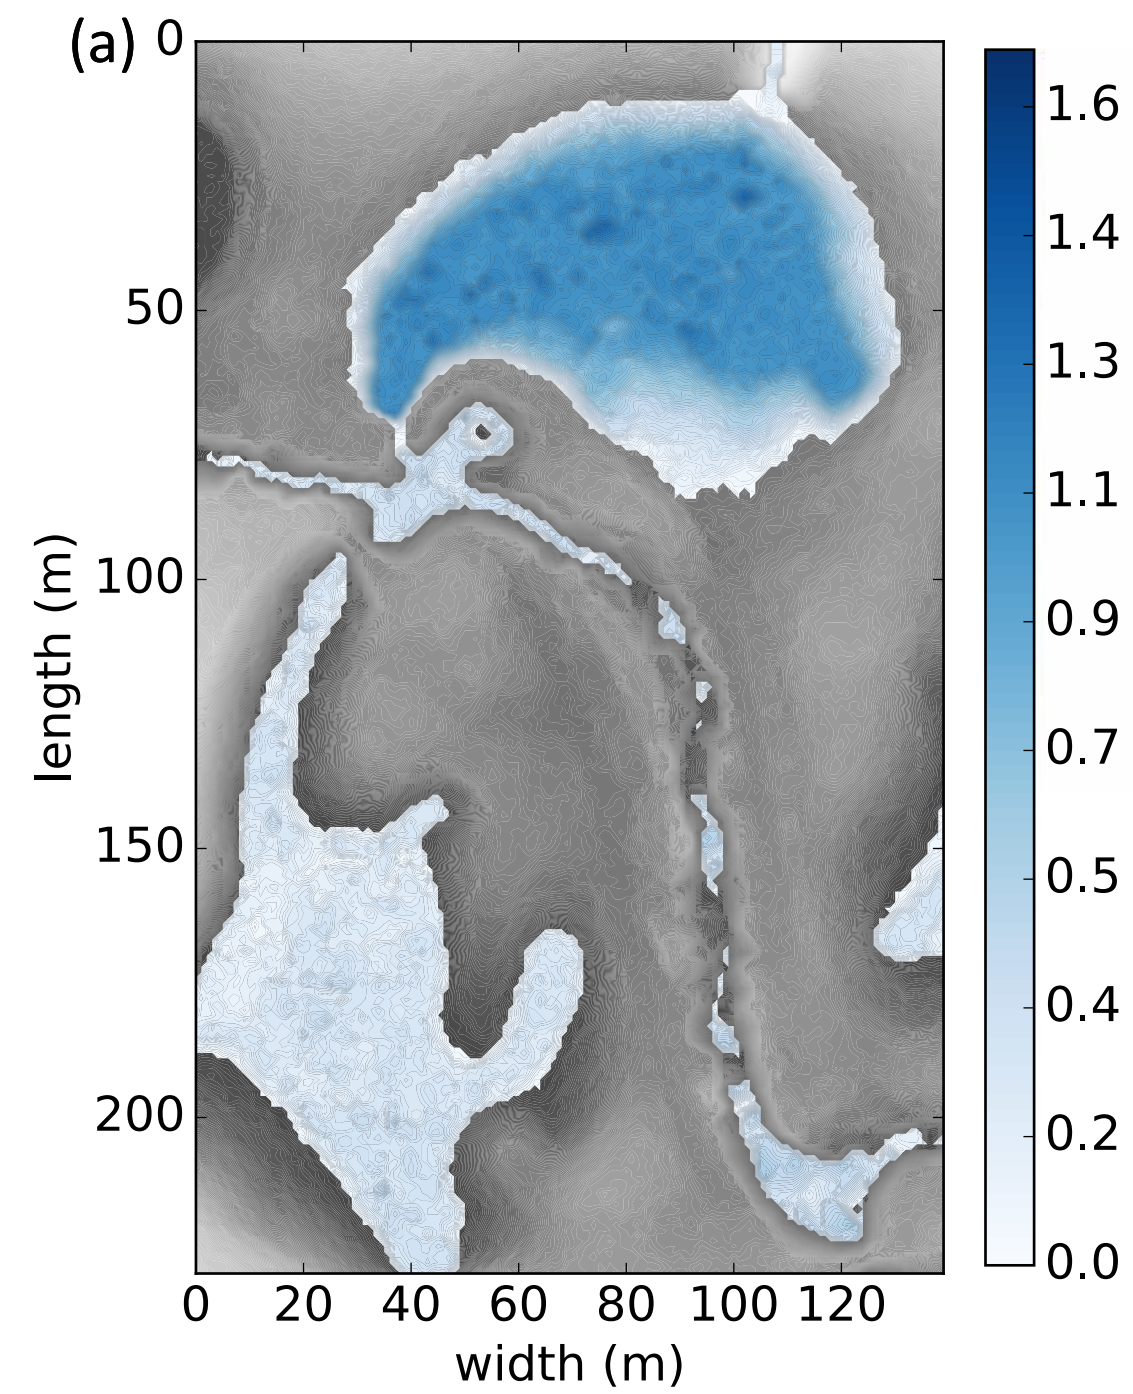


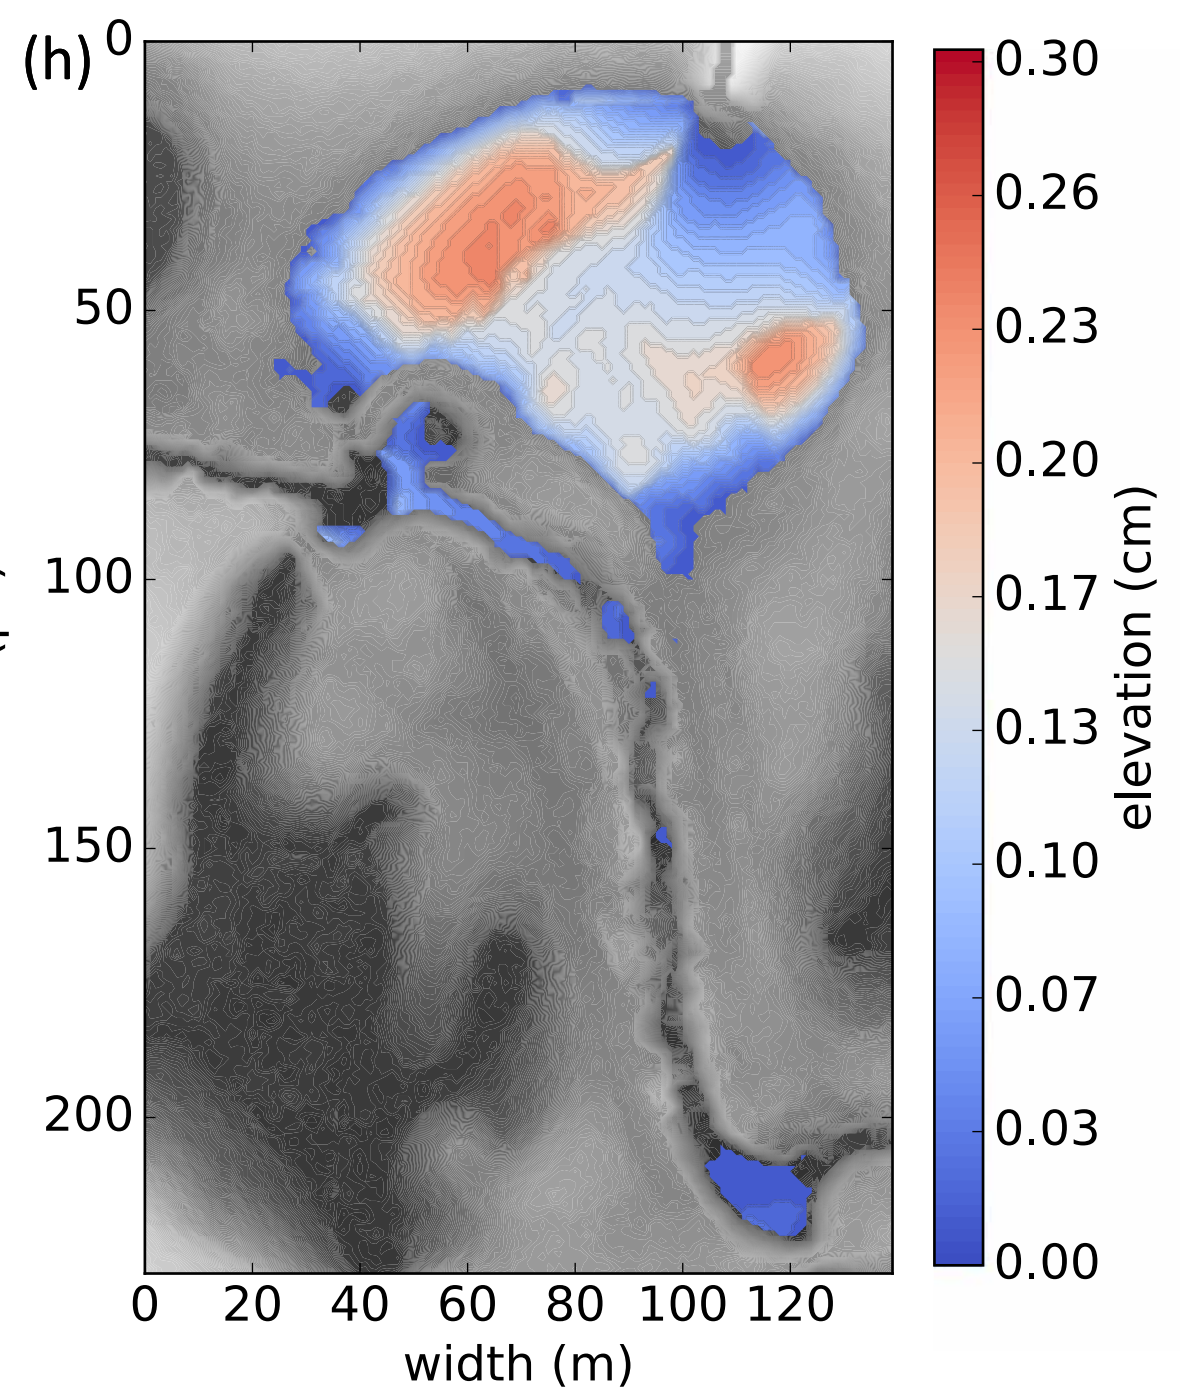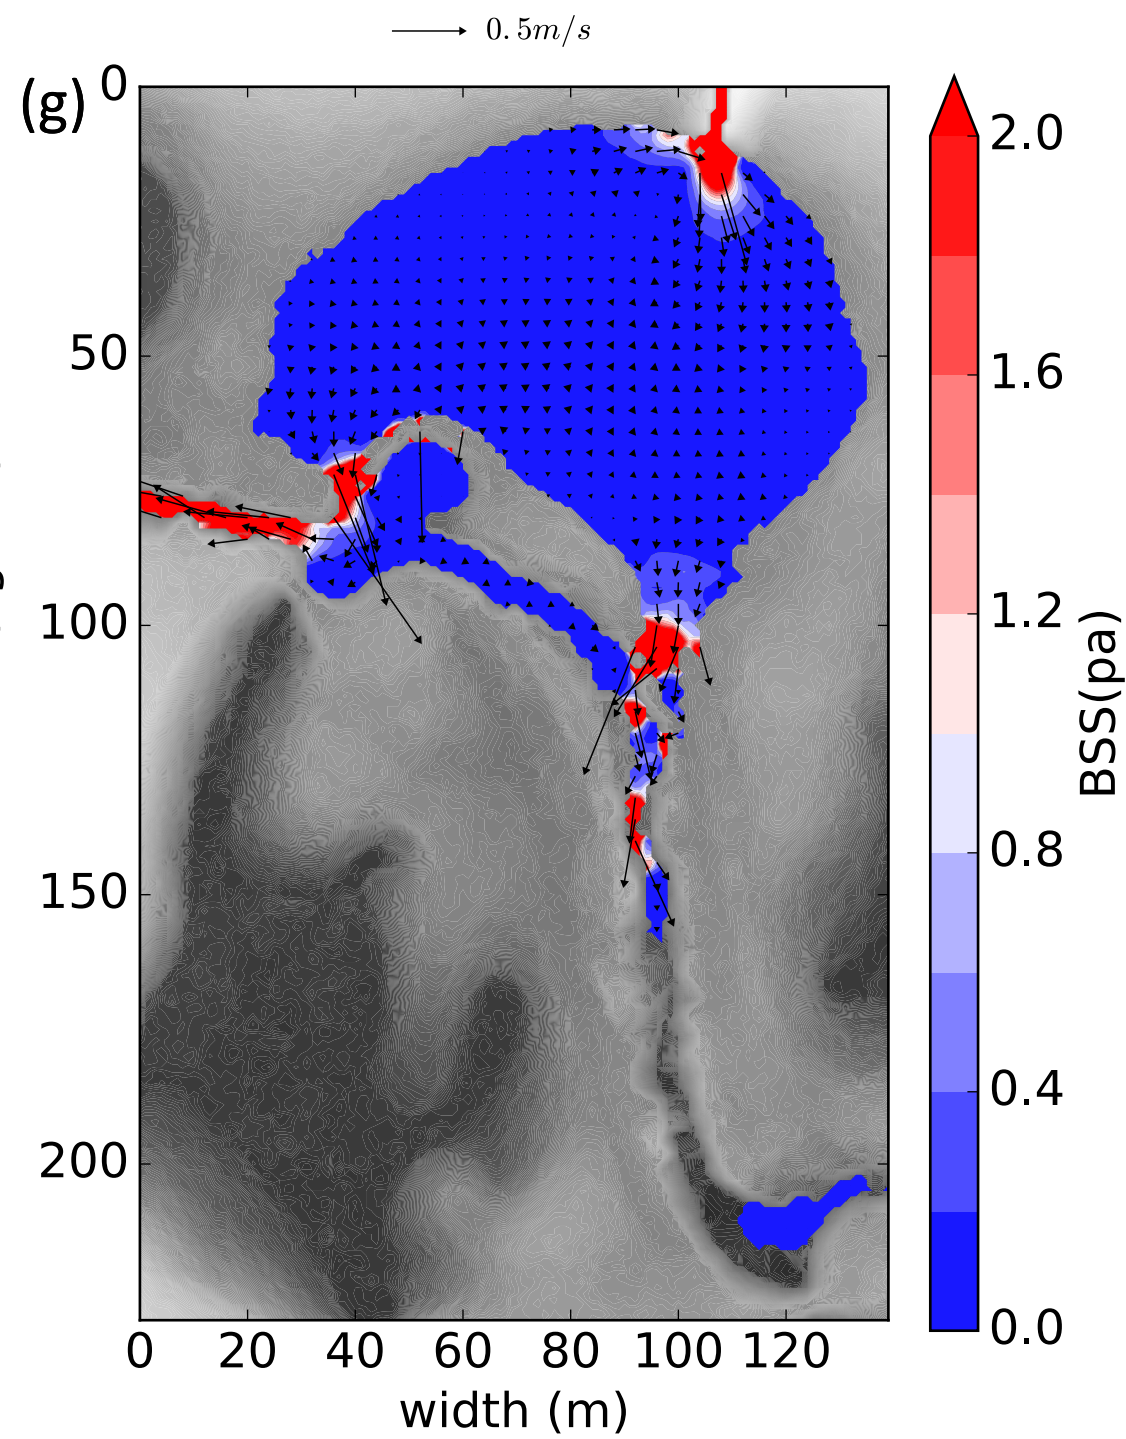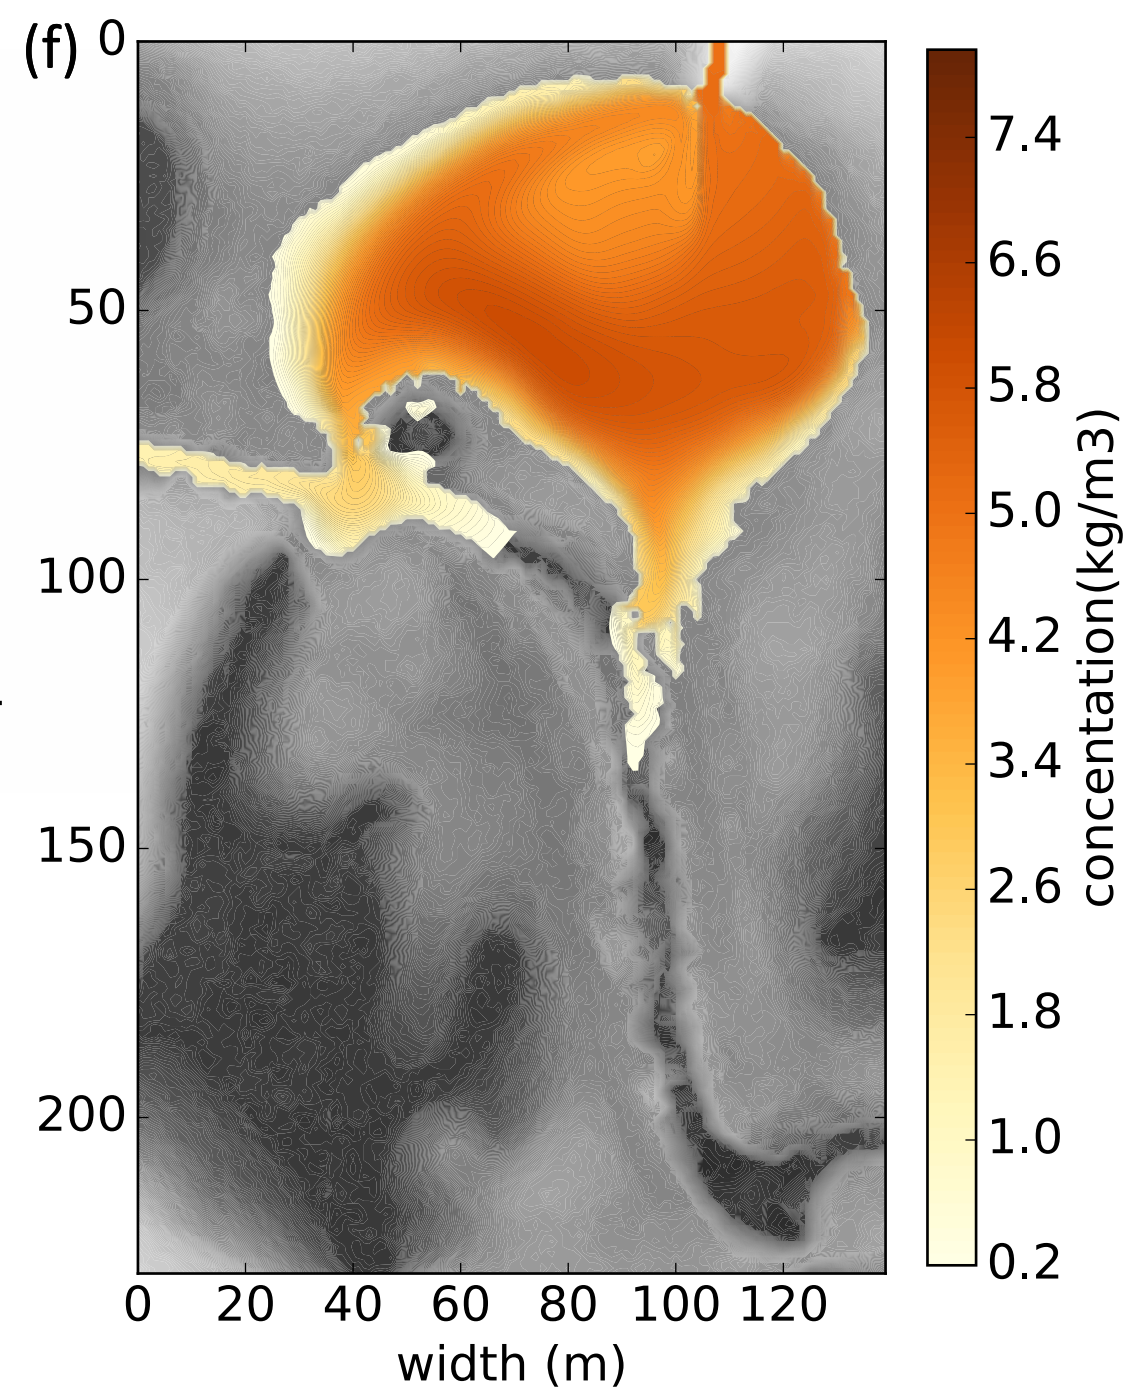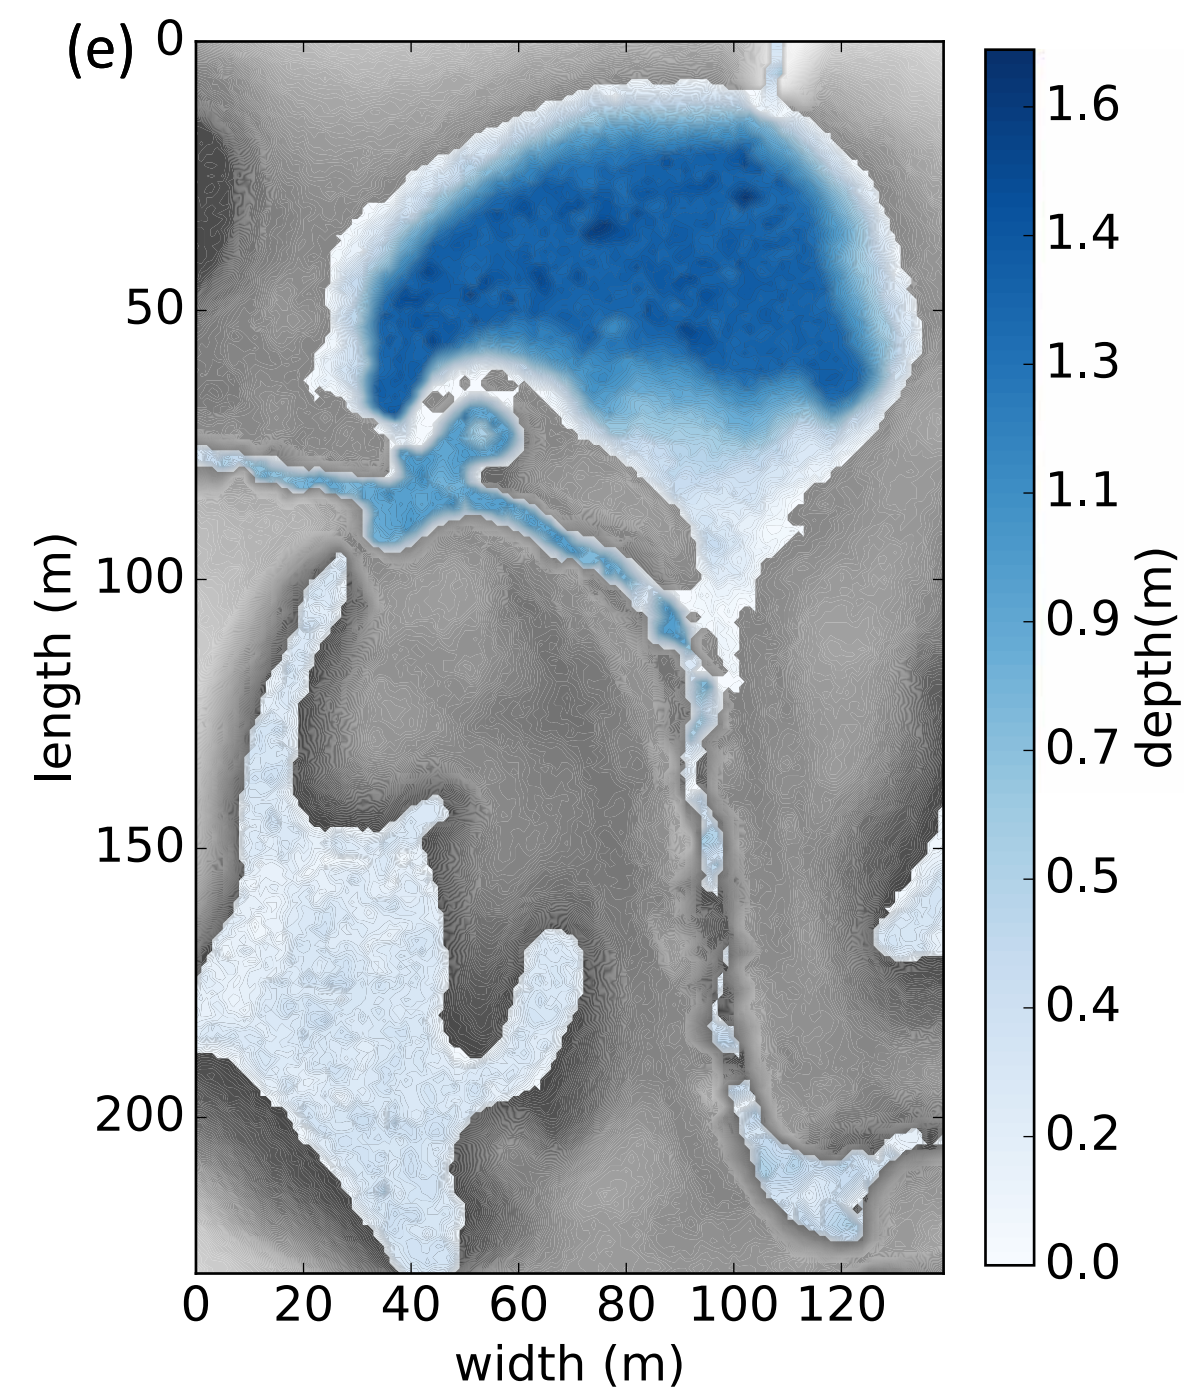


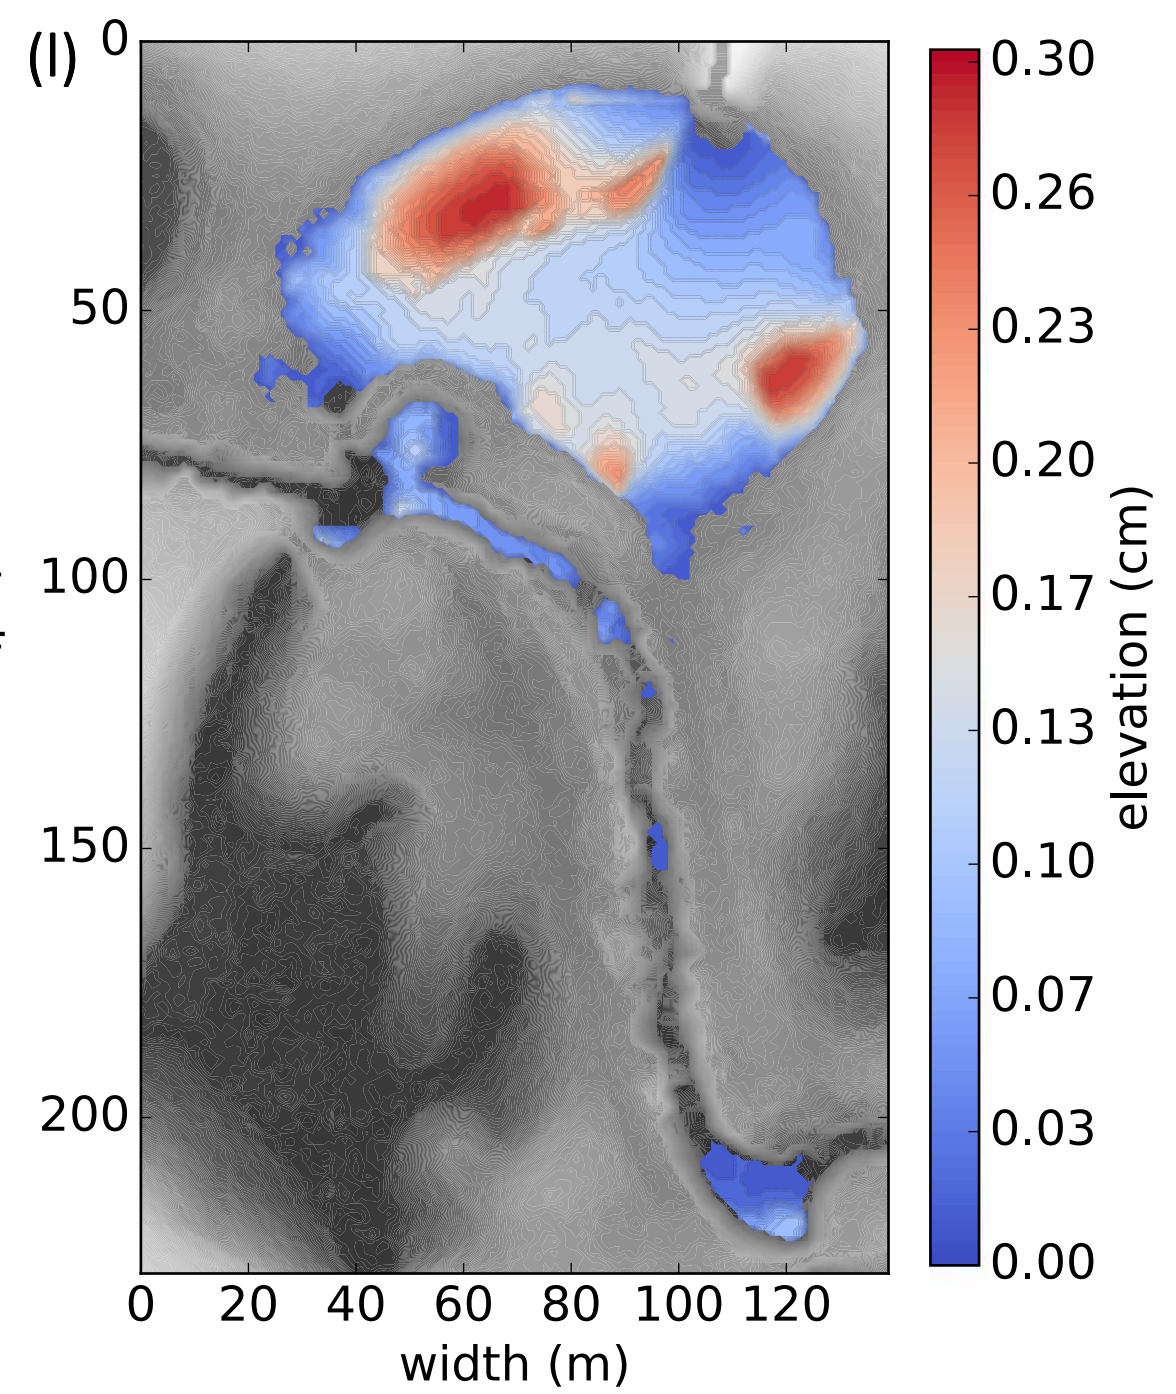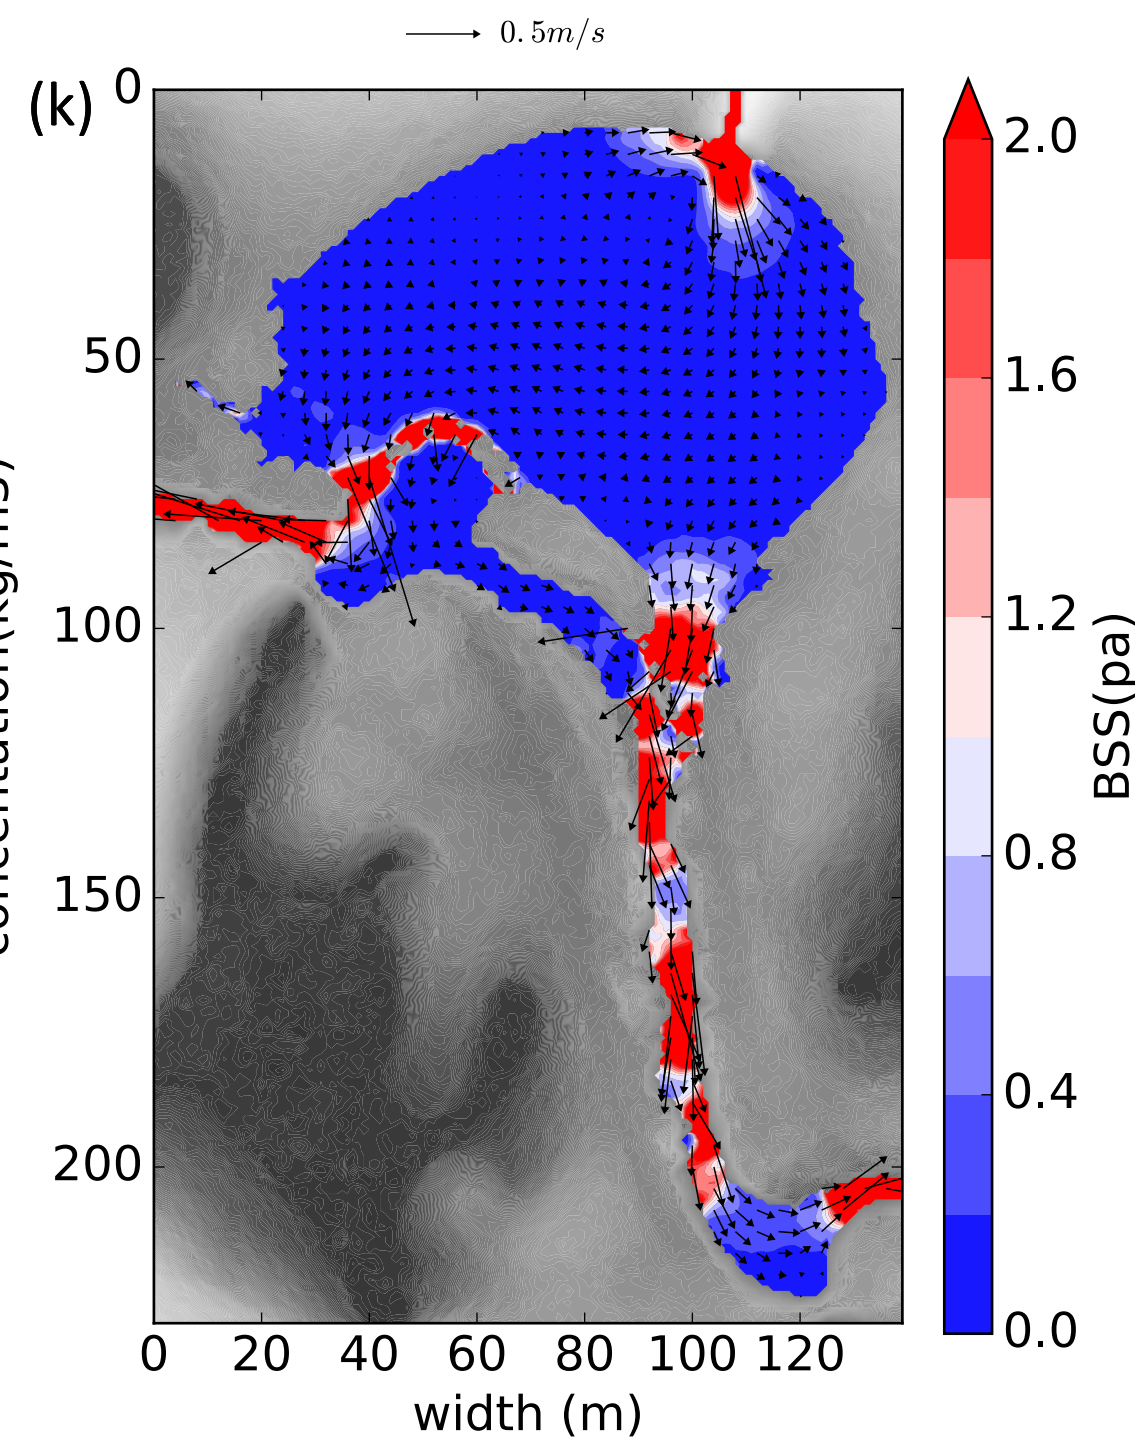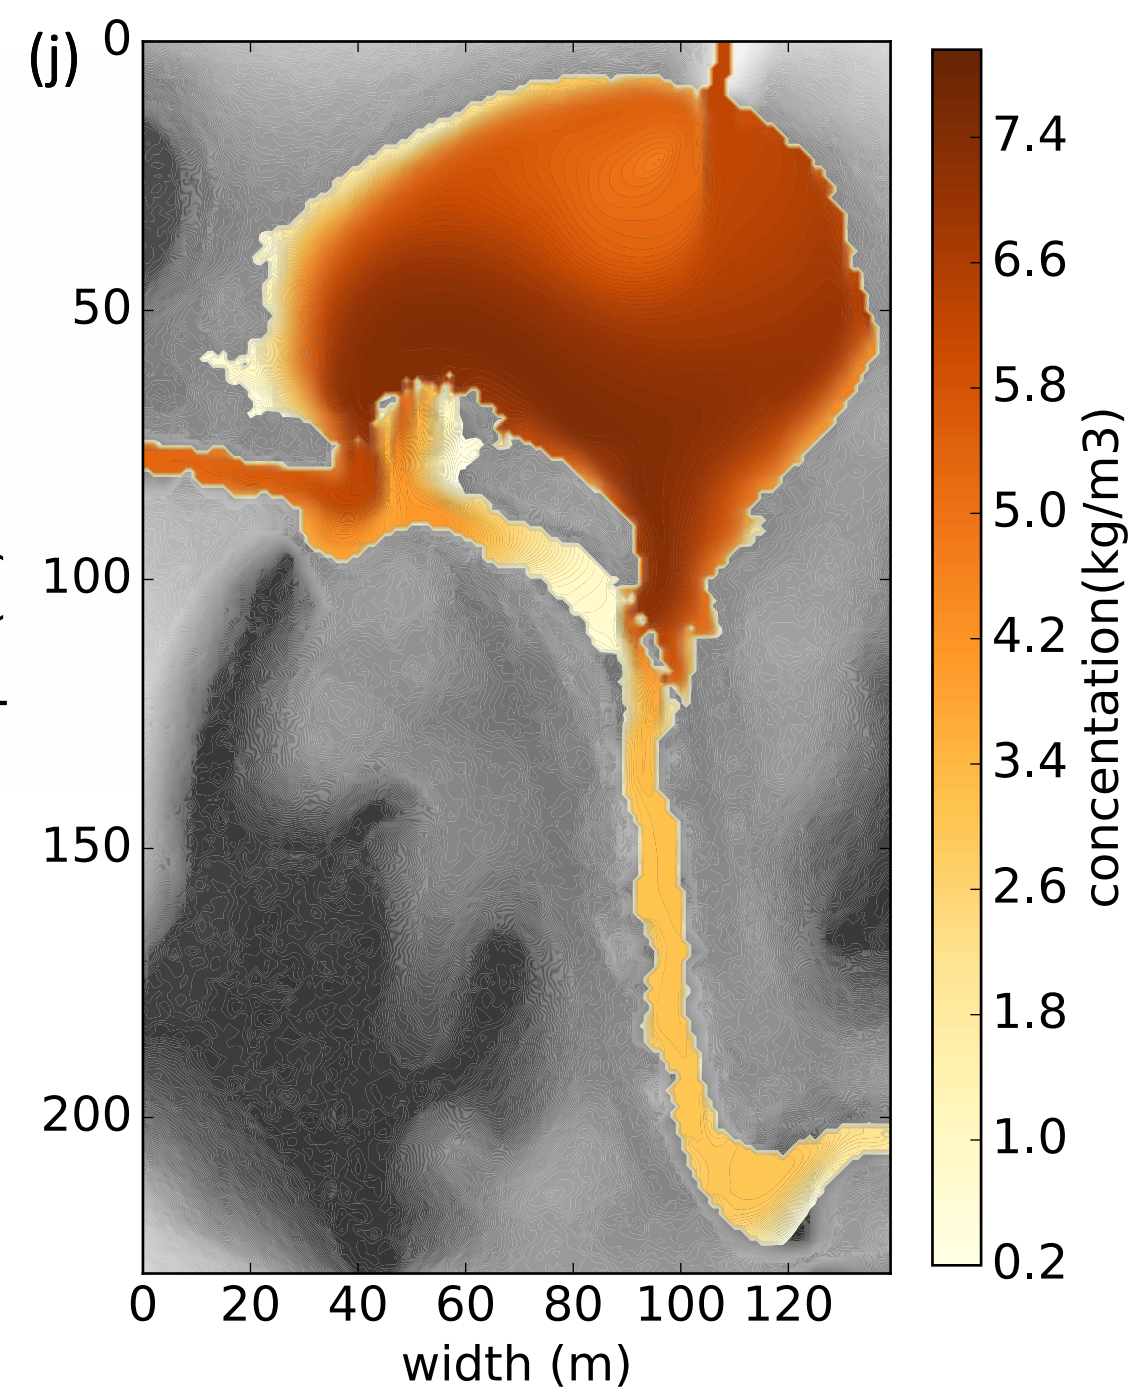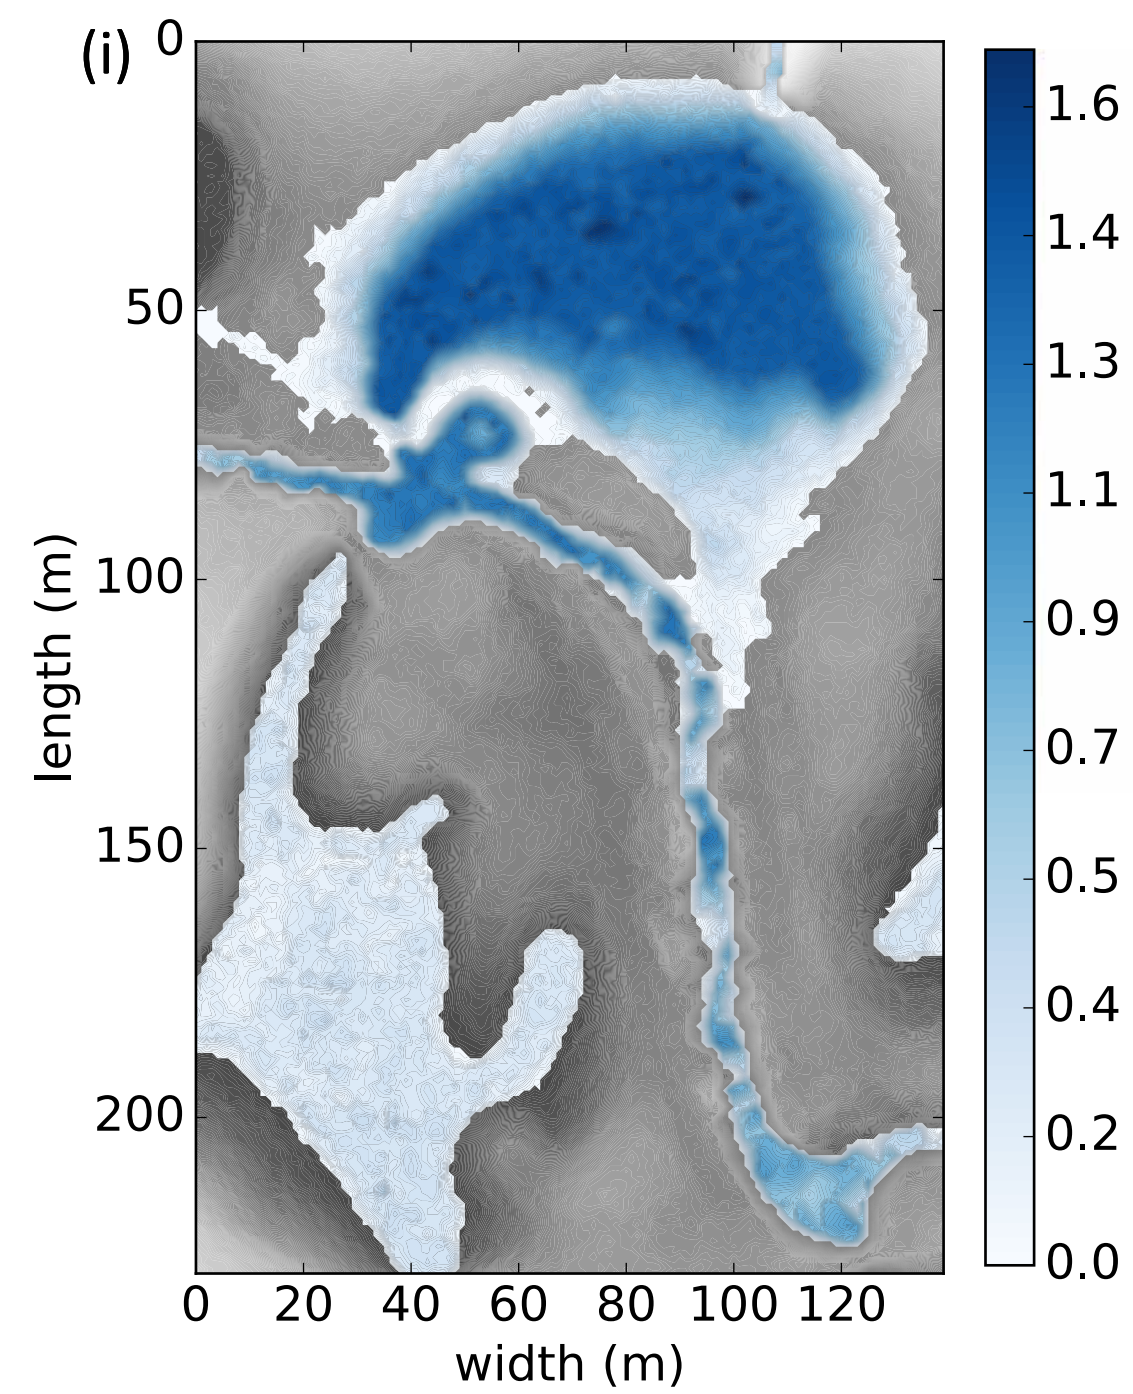


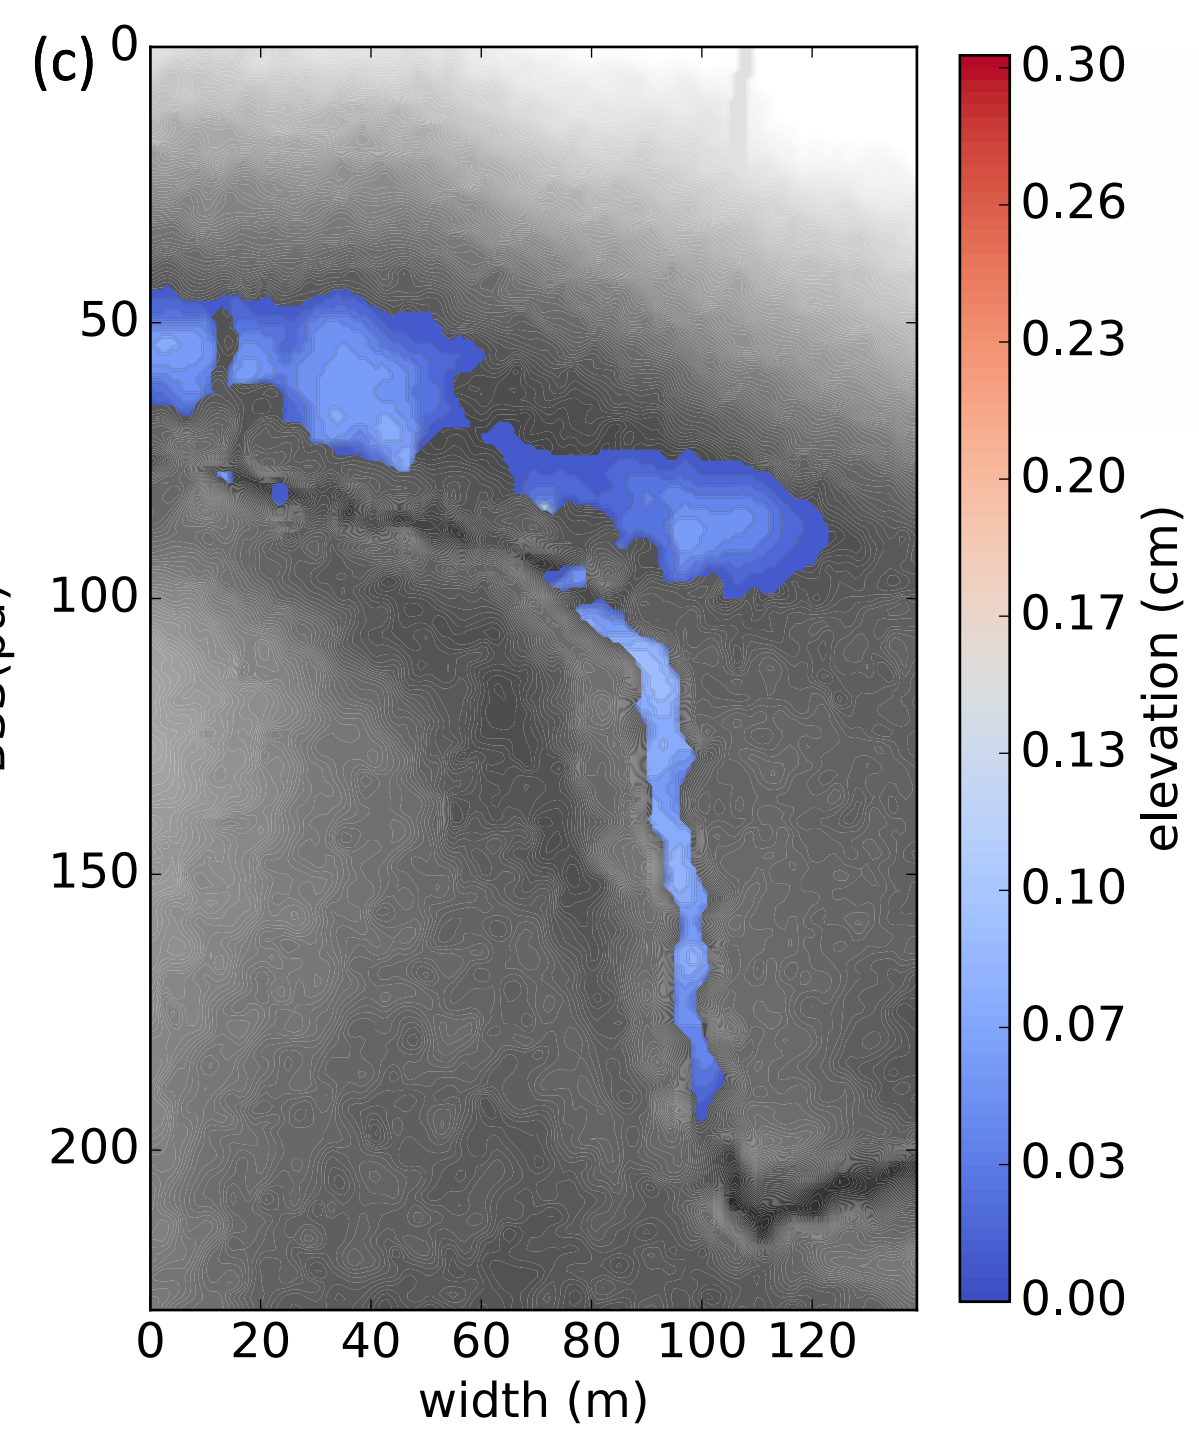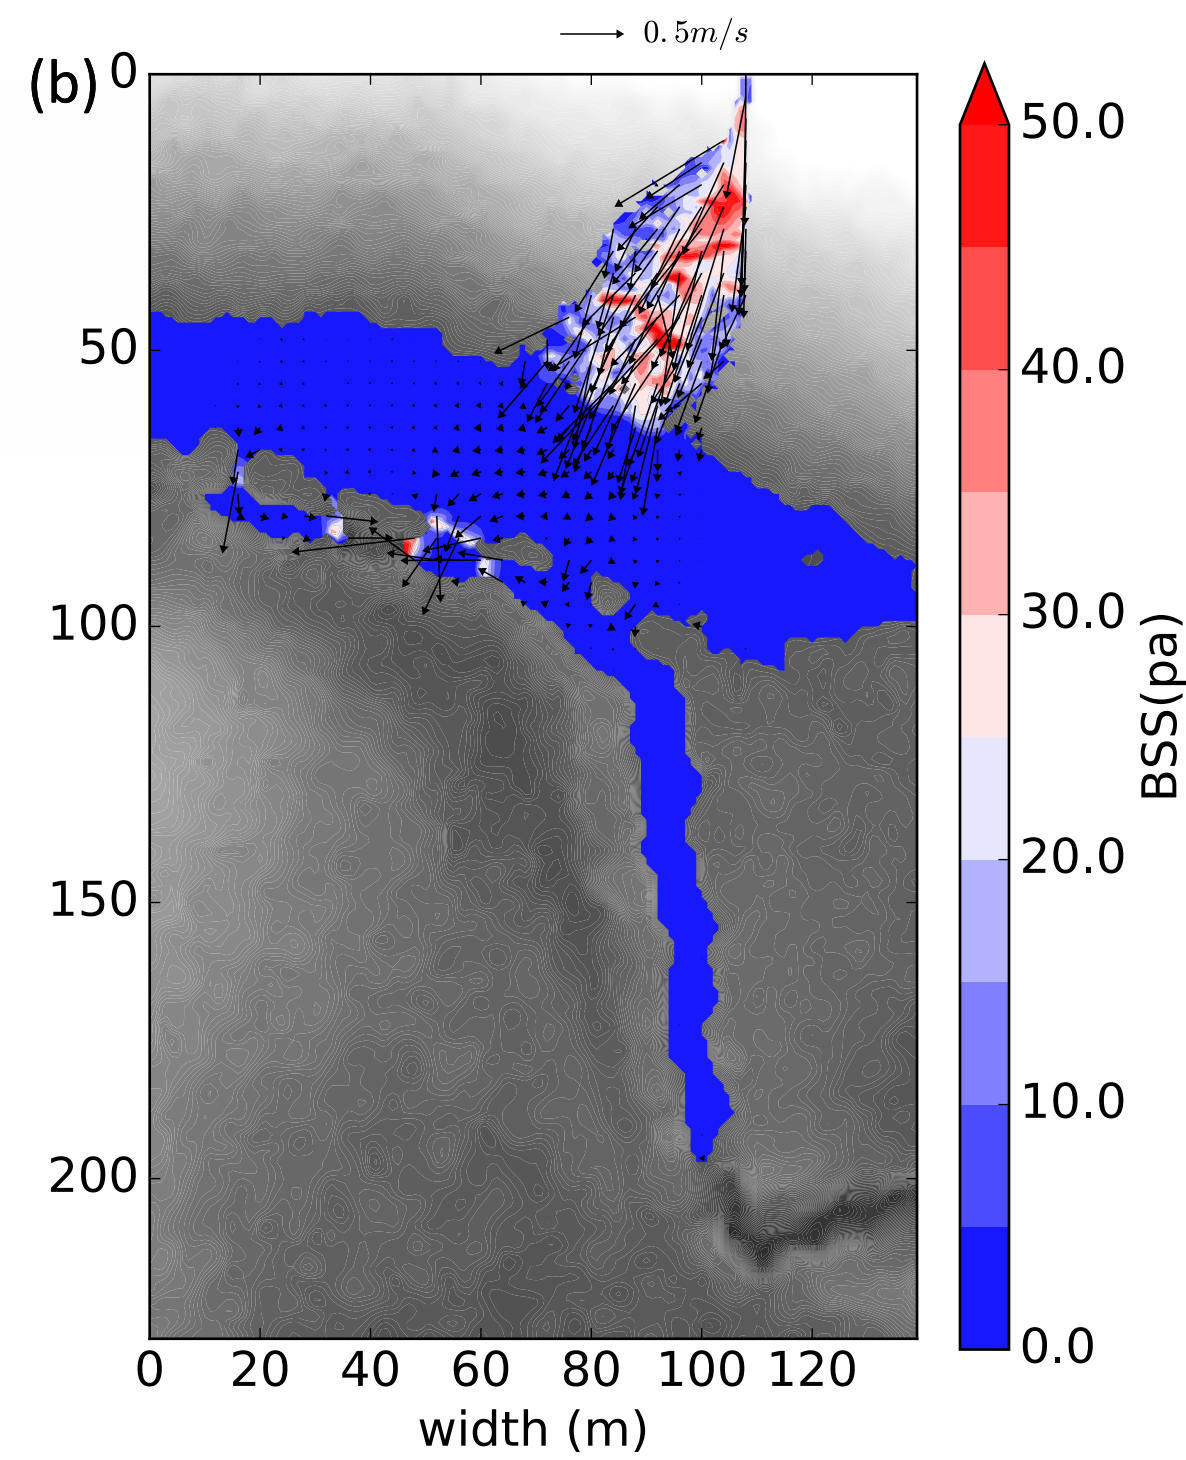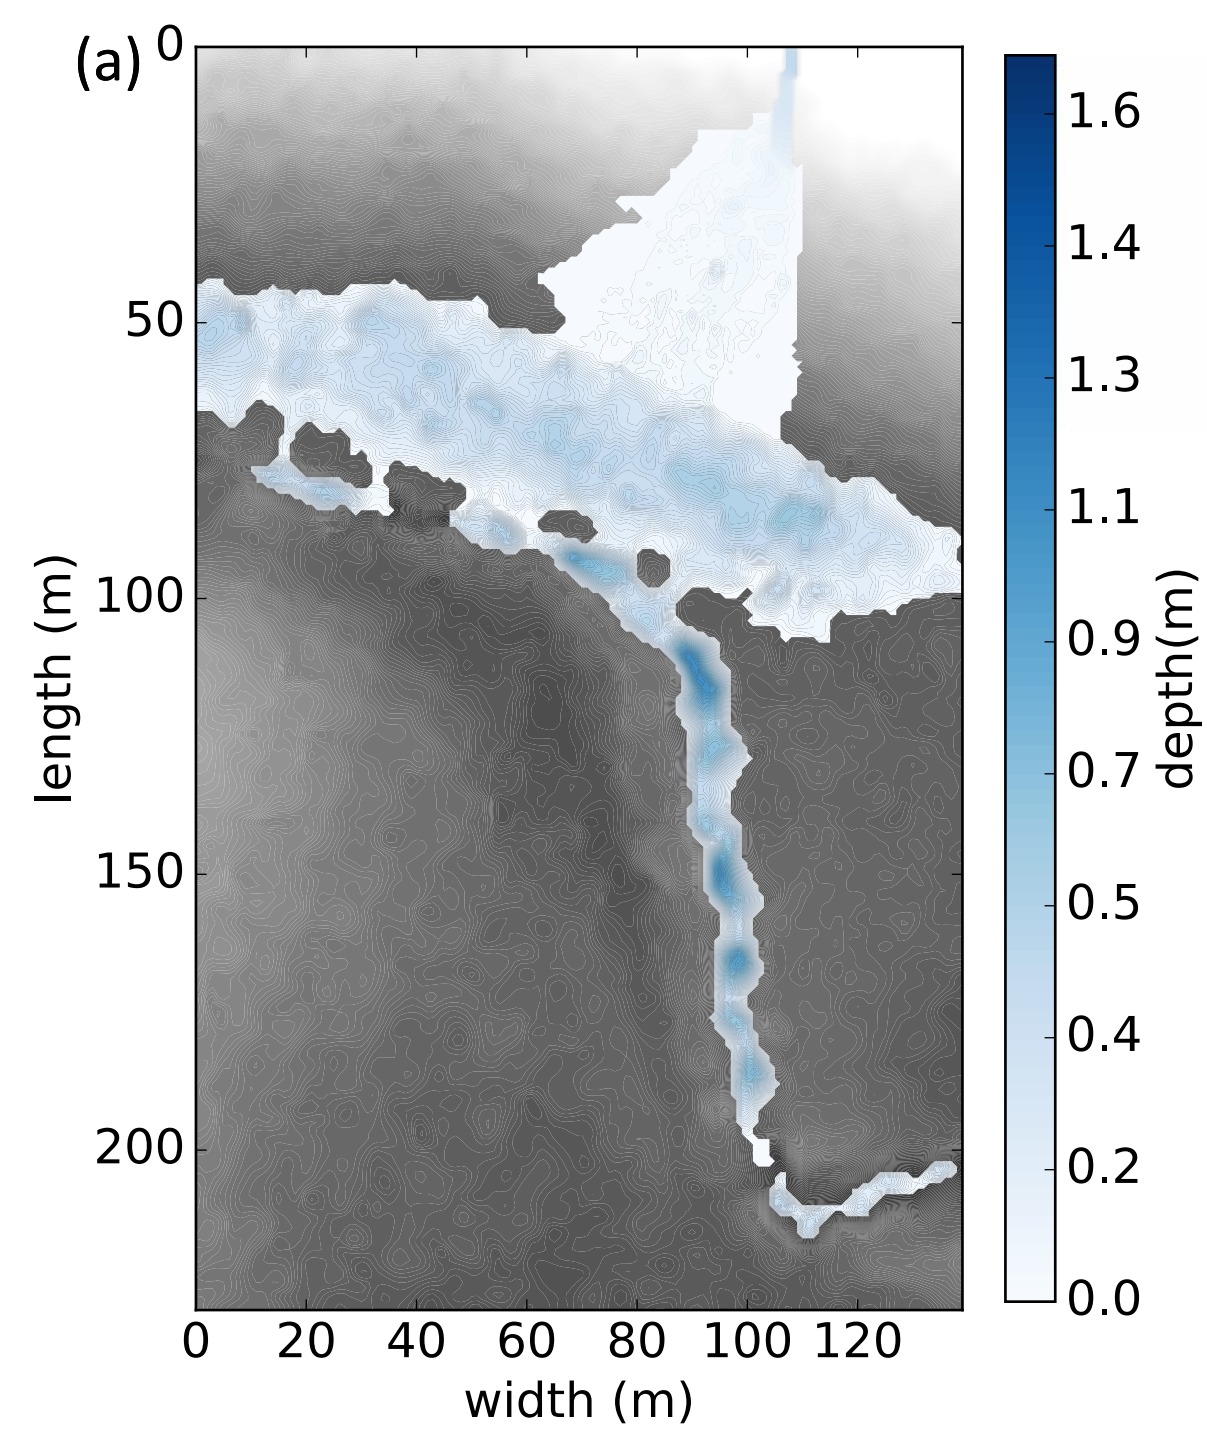

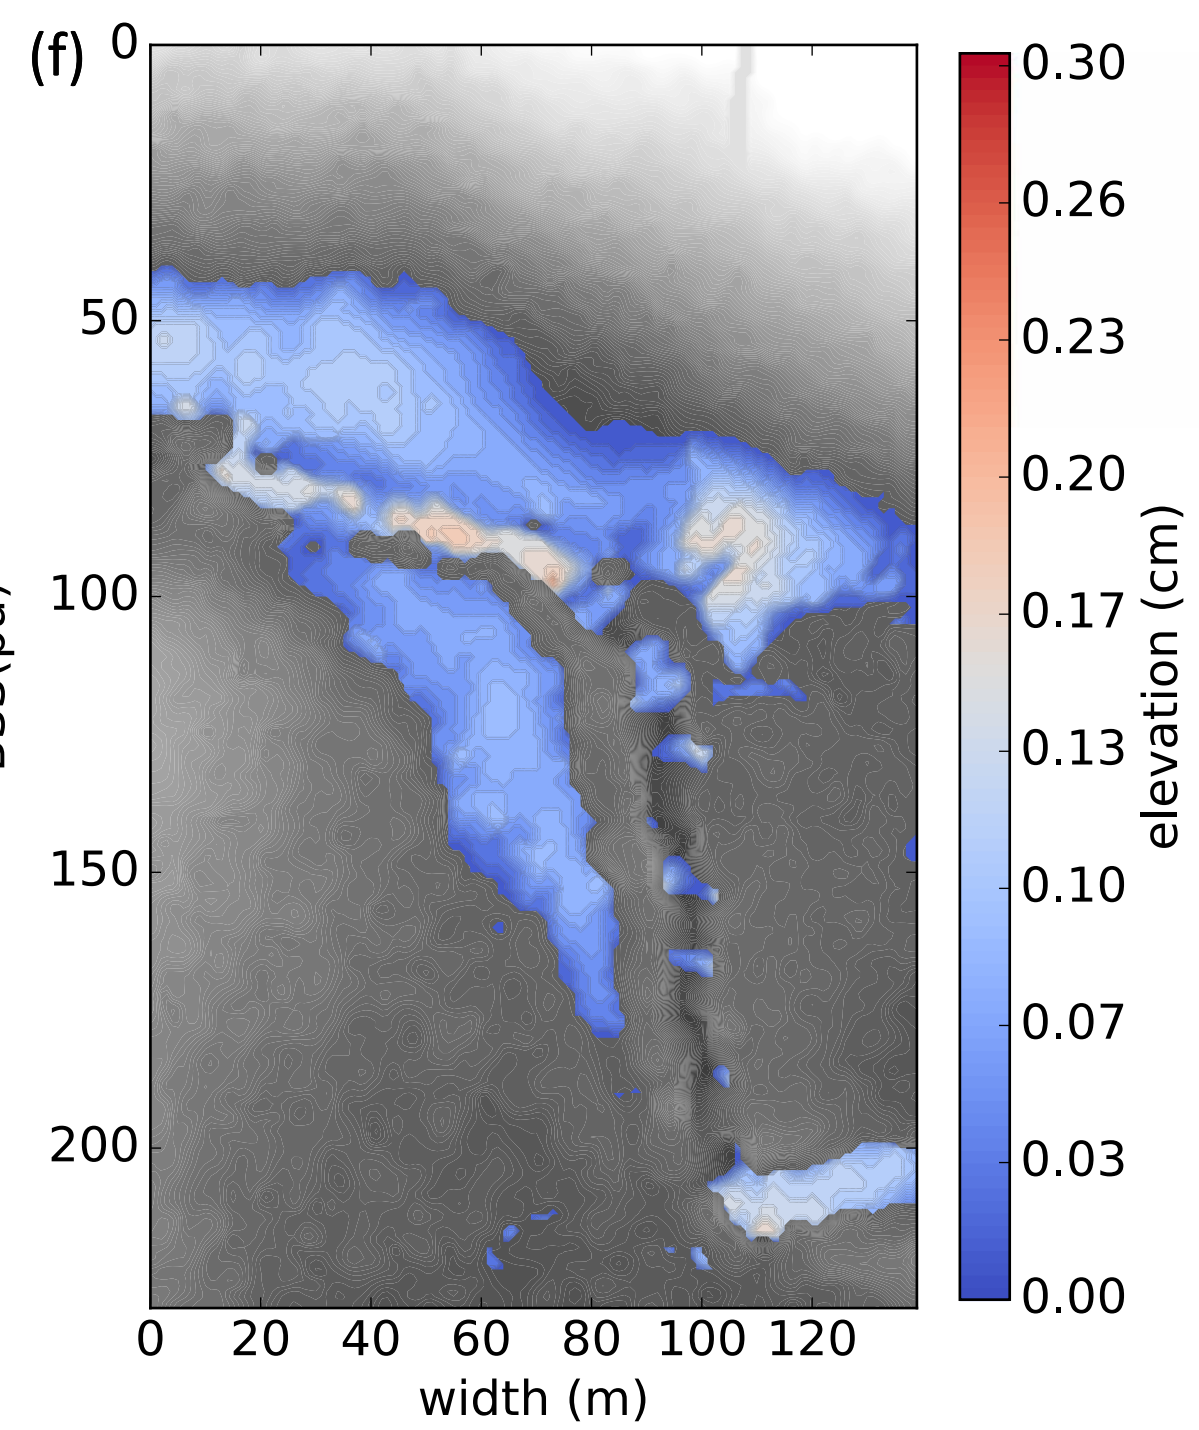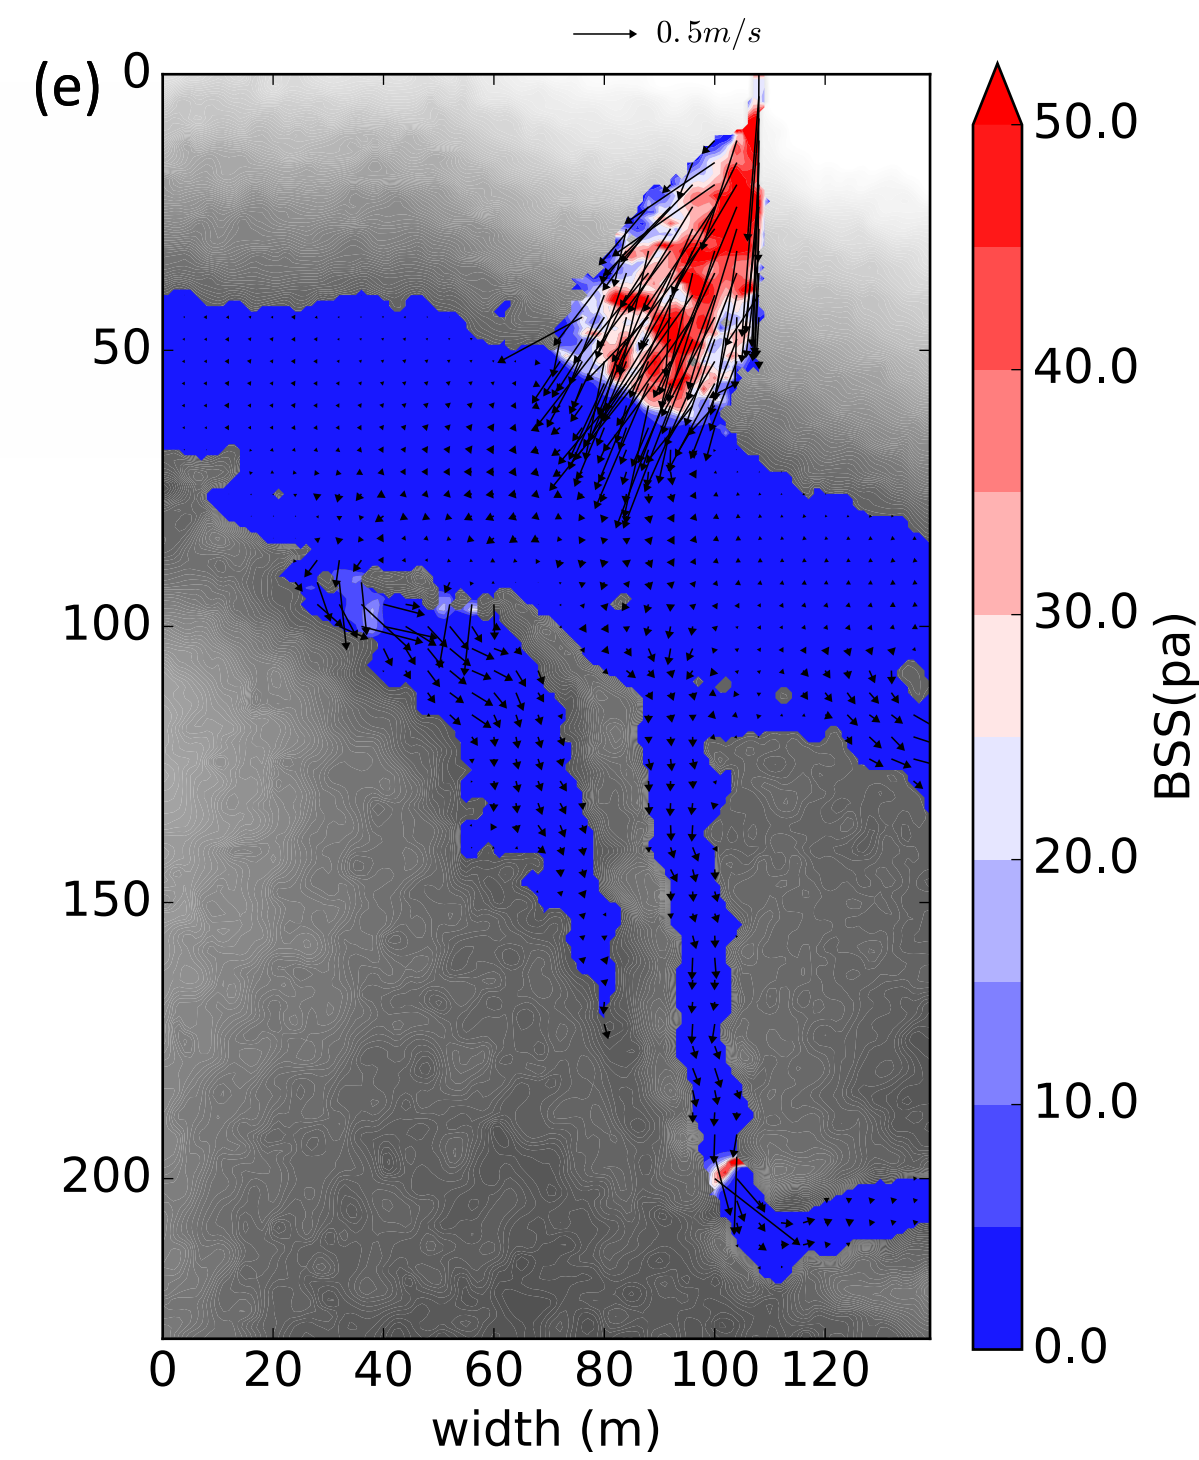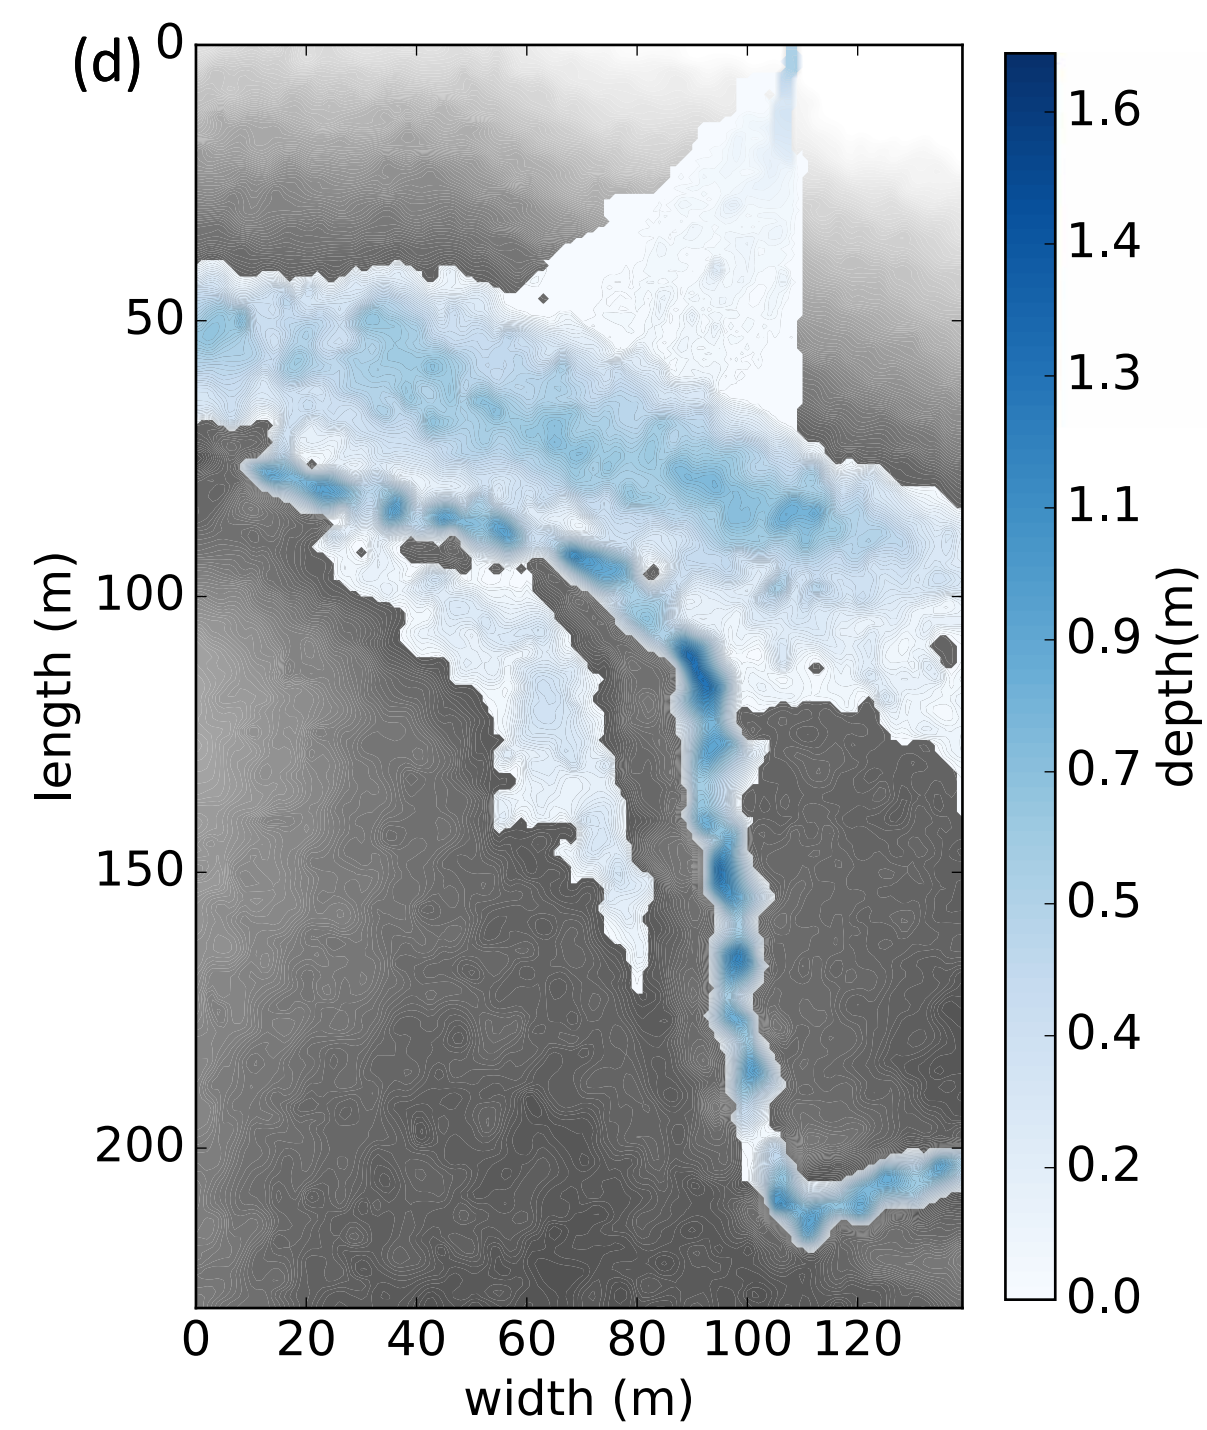

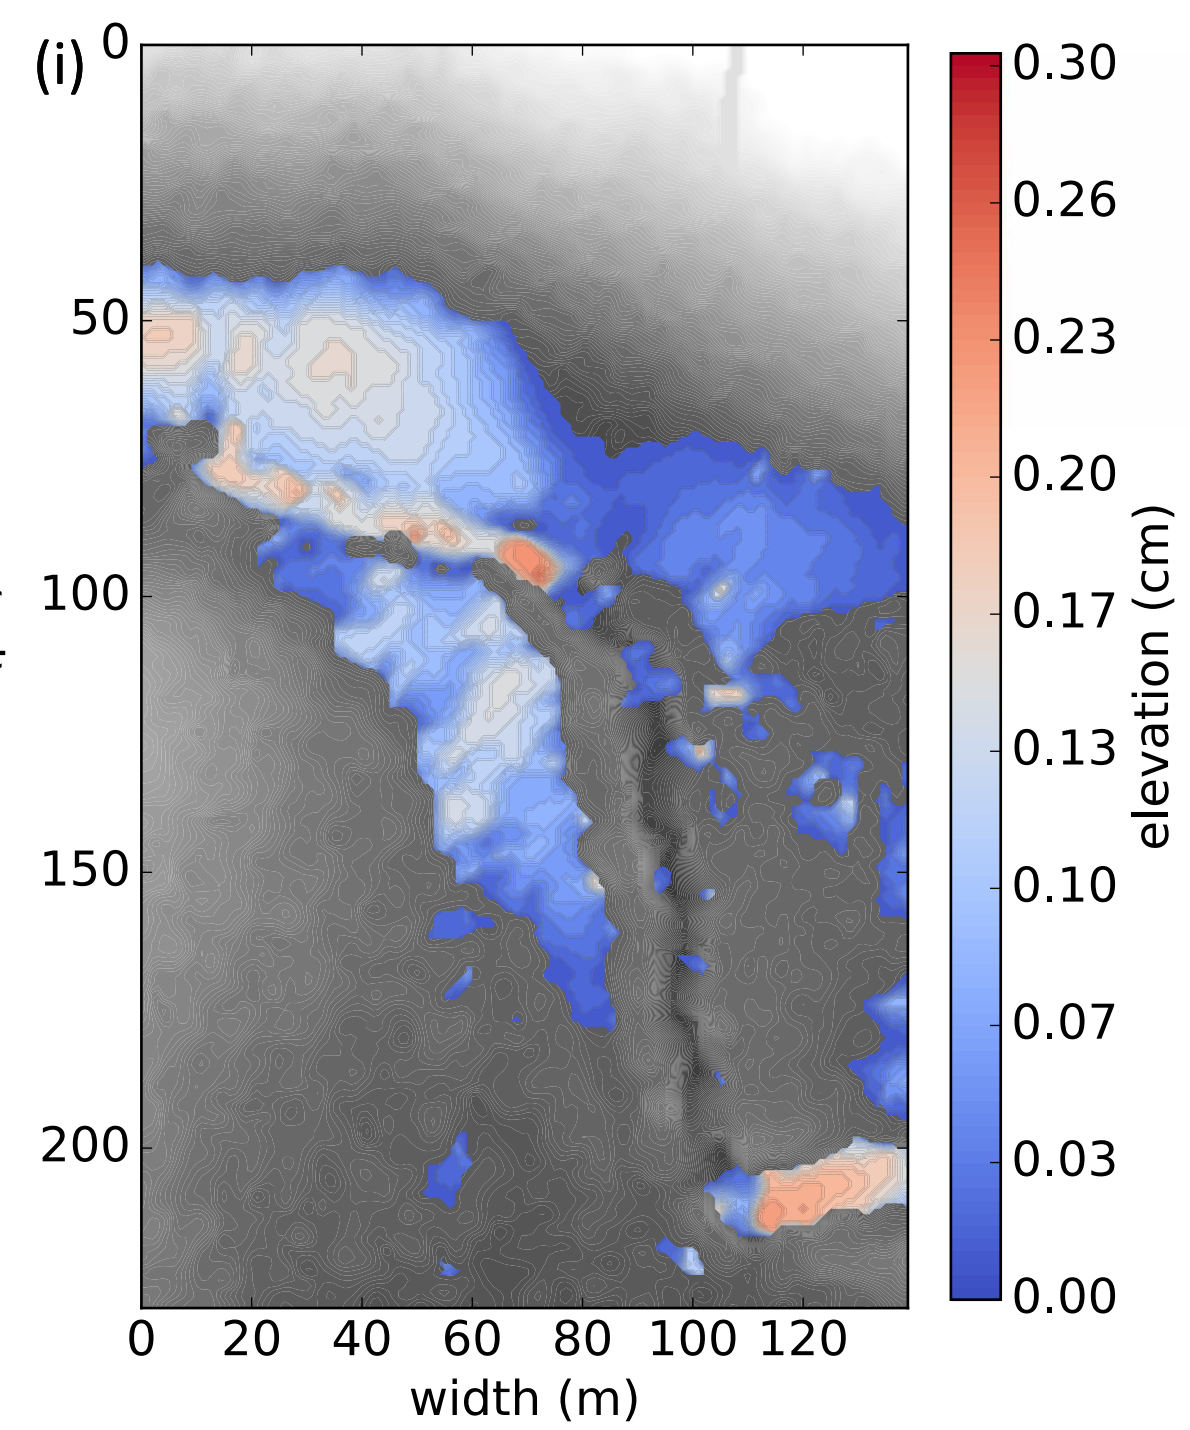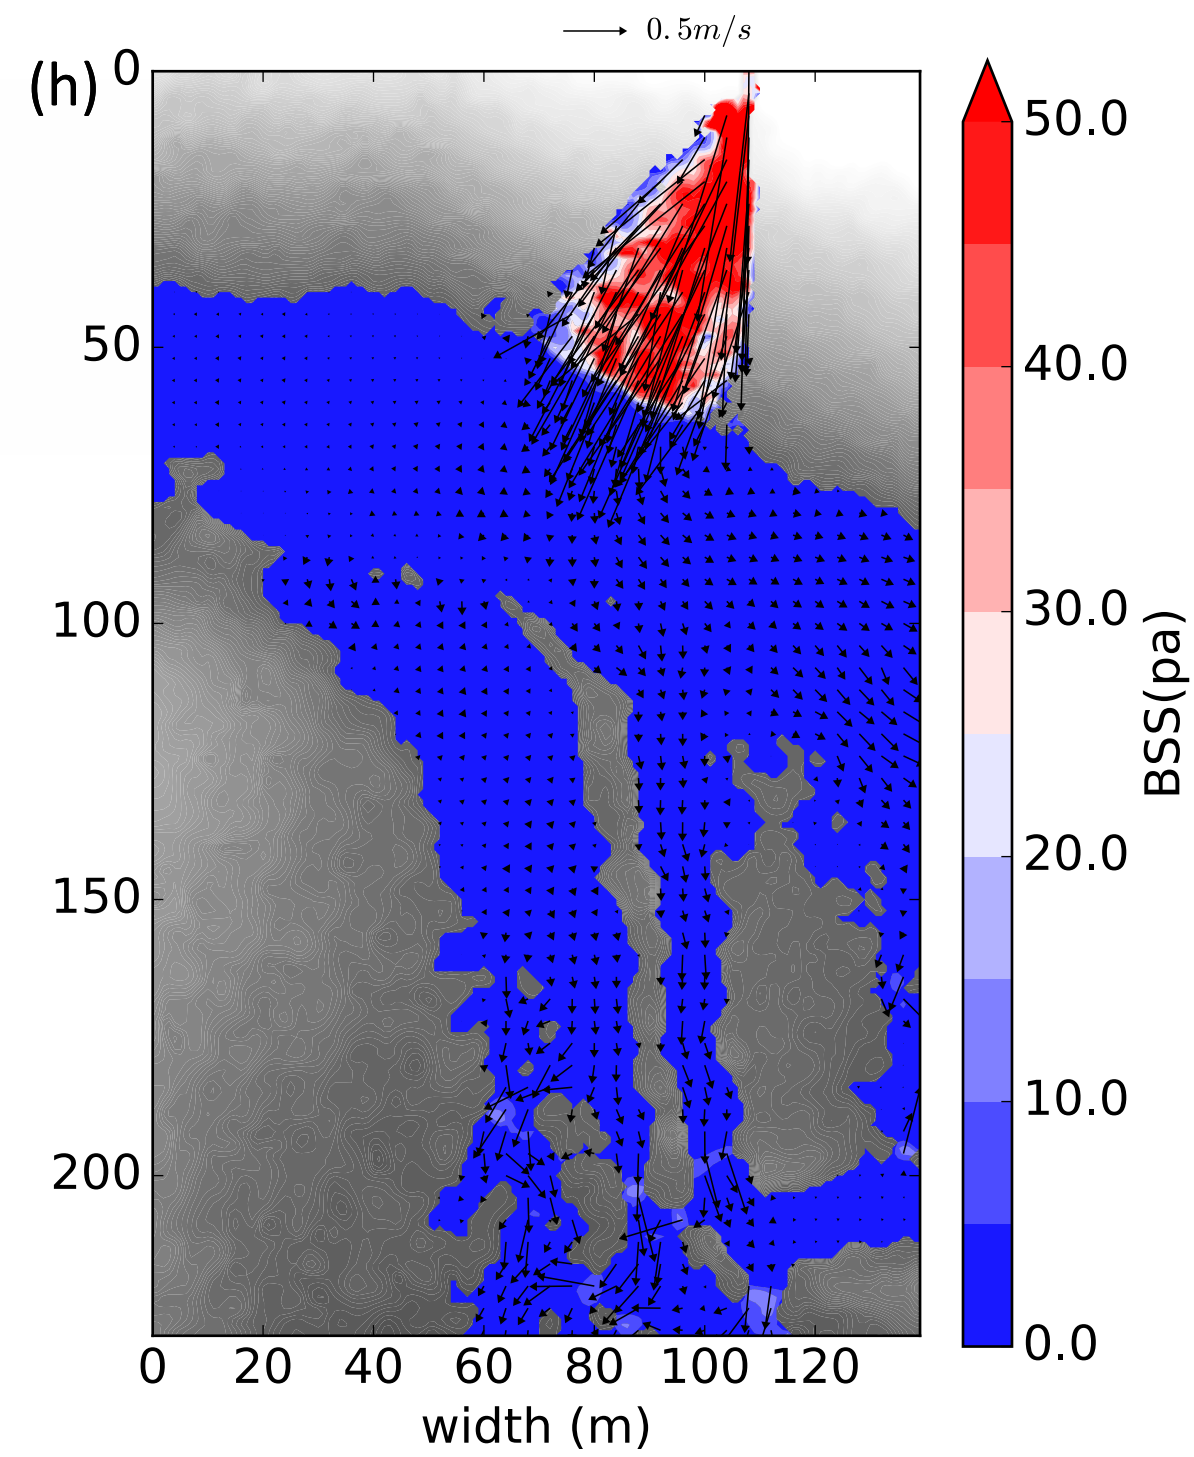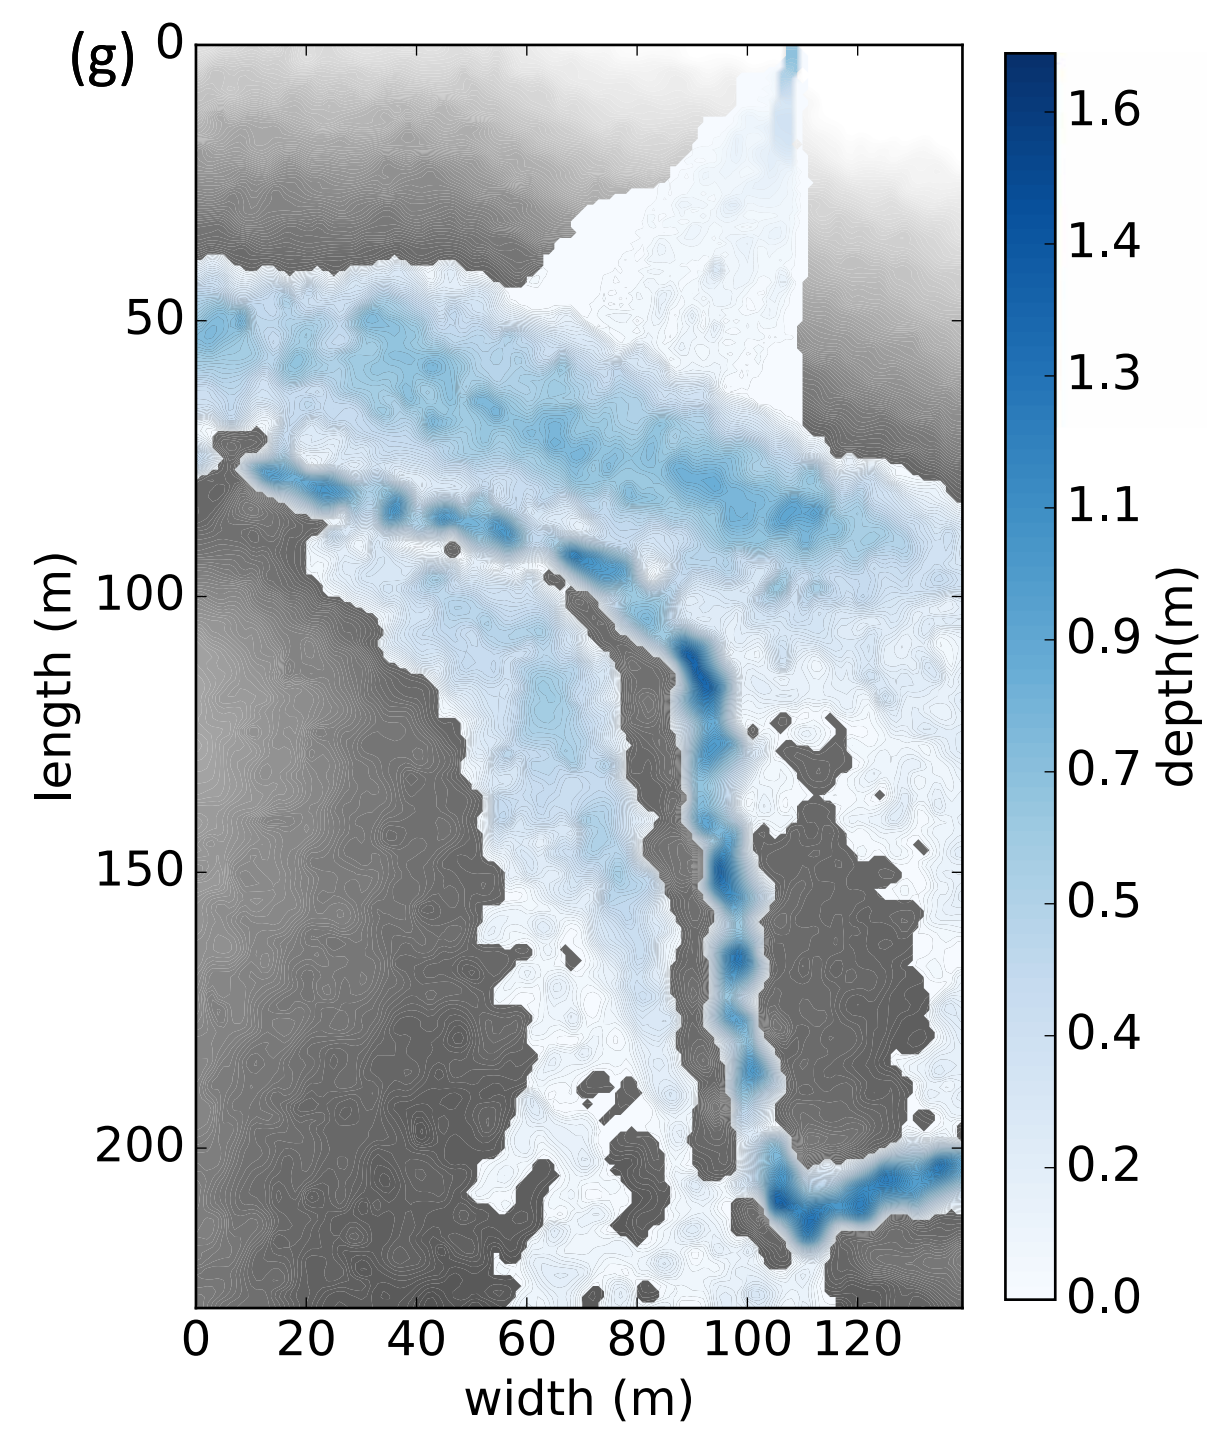

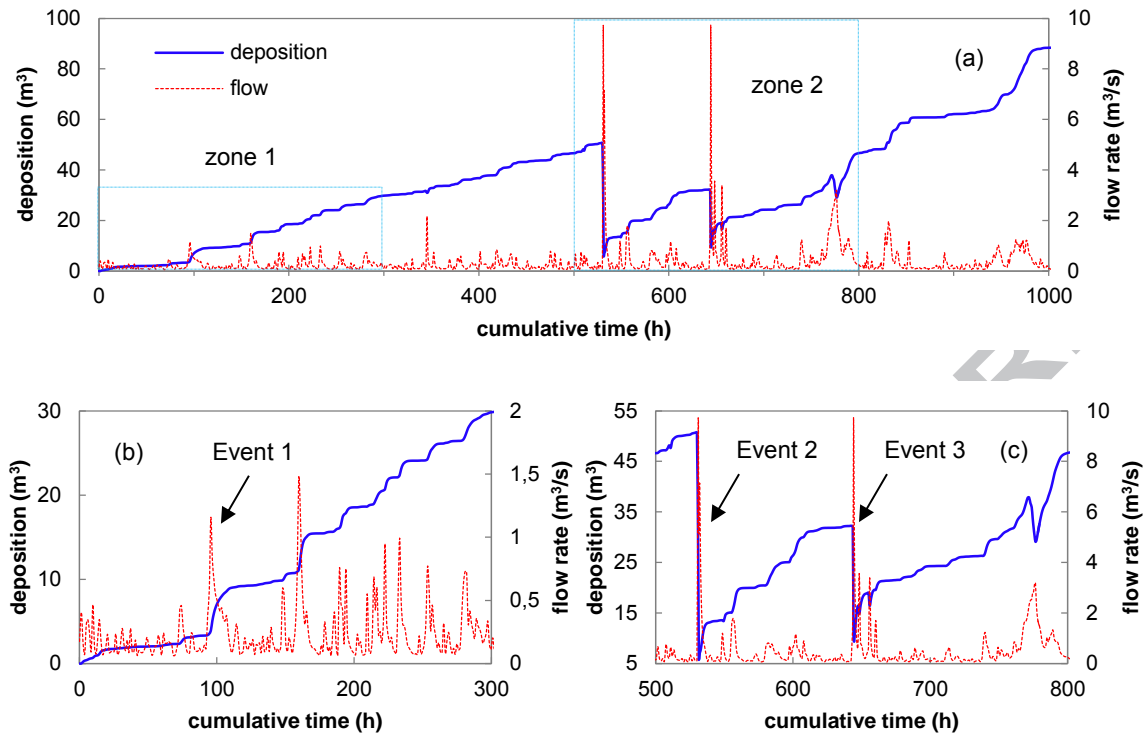

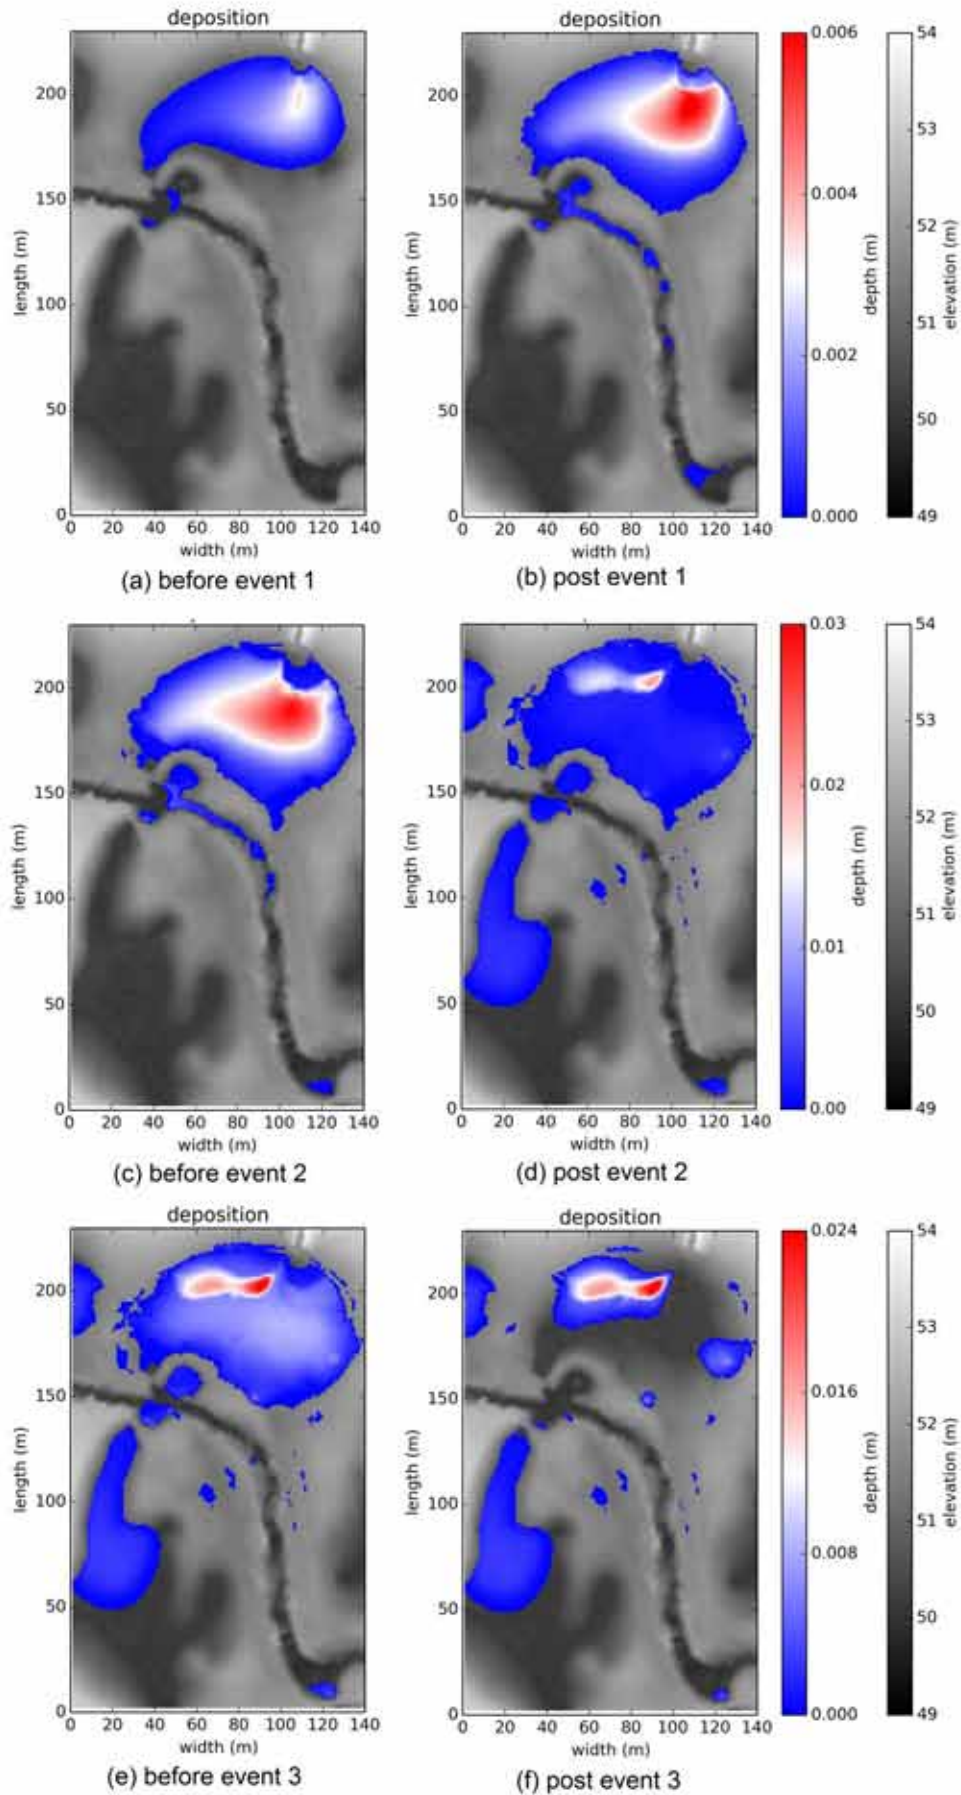

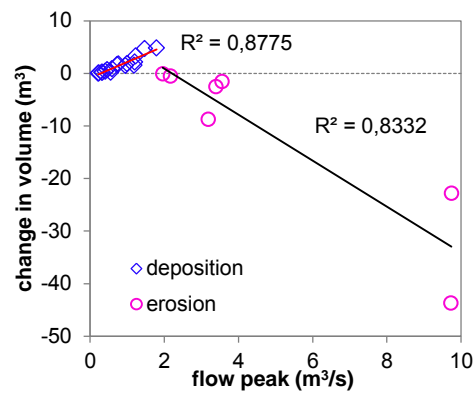


Table 1: key parameters of the three tests

side slopes	1:3 (Test 1), 1:7 (Test 2), 1:10 (Test 3)
channel length	30 m
inflow velocity at inlet	0.51 m/s
water depth at inlet	0.39 m
sand diameters	$d_{10} = 0.115$ mm, $d_{50} = 0.16$ mm, $d_{90} = 0.2$ mm
sand density	2650 kg/m ³
hindering settling velocity	0.015 m/s
Suspended load	0.03 ± 0.006 kg/s/m
bed load	0.01 kg/s/m
Manning's coefficient	0.016 s/[m ^{1/3}]
mesh size/number	0.02m / 150

Table 2: key parameters of the case

water depth	0.4 m (reservoir), 0.12 (downstream)
sand diameters	$d_{50} = 0.135$ mm
sand density	2248 kg/m^3 (natural), 720 kg/m^3 (dry)
hindering settling velocity	0.015 m/s
Suspended load	$0.03 \pm 0.006 \text{ kg/s/m}$
bed load	0.01 kg/s/m
Manning's coefficient	$0.02 \text{ s/[m}^{1/3}]$
sediment porosity	0.35
mesh size	$\Delta x = 0.05 \text{ m}$, $\Delta y = 0.02 \text{ m}$
mesh number	370×80 cells

Table 3 key parameters of the case

water depth at outlet	0.15 m
inflow velocity at inlet	0.6 mm
sand diameters	$d_{50} = 0.6 \text{ mm}$
sand density	2650 kg/m^3
settling velocity	0.013 m/s
Manning's coefficient	$0.03 \text{ s/[m}^{1/3}\text{]}$
sediment porosity	0.35
mesh size	$\Delta x=0.1 \text{ m}, \Delta y_1=0.02 \text{ m}, \Delta y_2=0.05 \text{ m}$
mesh number	$80 \times 116 \text{ cells}$

Table 4. The data and key parameters used in the study

Data	Description	Purpose
DEMs	developed bed with pond: 1m × 1m predevelopment without pond: 1m × 1m	Model input
Sediment concentration	it is estimated based on the regression relationships between flow, turbidity and suspended load concentration from the analogue catchment (Ahilan et al., 2016)	
Recorded inflow	23/04/2015 – 26/05/2015	Model validation
Scenario-based hydrograph	5-year flow (non-flooding) 30-year flow (designed flow) 100-year flow (flooding)	Analysis of dynamics of flow and fine suspended sediment
2012 extreme inflow	modelled hydrograph based on the measured rainfall with 15 minutes interval at the Jesmond Dene gauging station	
Sediment composition	d10=5 µm (fine silt) d50 = 12 µm (fine silt) d90 = 50 µm (silt)	Model input
Sediment density	1800 kg/m ³	
Manning's roughness coefficient	n = 0.038 s/[m ^{1/3}]	
Mesh size/number	1 m × 1 m / 230 × 140 cells	

Table 5. Measured and simulated deposition depth at the 6 monitoring points

	Measured (mm)	Simulated (mm)
1	10	17.8
2	8.3	19.9
3	8.7	7.6
4	3.7	7.4
5	3.8	8.4
6	0.1	1.6

ACCEPTED MANUSCRIPT

Table 6. Sediment mass balance for different flood event

	5-year	30-year	100-year
input (m ³)	7.35	16.71	28.41
deposition (m ³)	4.58	7.29	7.50
percentage (%)	62.0	43.6	26.4

ACCEPTED MANUSCRIPT

Highlights:

- A 2D model is used to track morphological processes dominated by suspended sediment
- We explored fine sediment dynamics in a stormwater pond based on modelling outputs
- A stormwater pond attenuates flow peak and traps fine sediment particles
- The magnitude of flow peaks affects sediment deposition and re-suspension in a pond
- A stormwater pond has a critical value for inflow causing bed erosion or deposition